LabLog — Digital Practical Lab Book

SE5070 Enterprise Mobility · Assignment Report

MSc in IT (Enterprise Application Development) · 2026 · Year 1 · Semester 1

Student	Thanura Manjitha Peiris
Index number	MS26928210
Project area	0 — Edtech
Platform	Native iOS (Swift / SwiftUI) · custom Express + TypeScript API · Supabase (Postgres, Auth, Storage)
Source code	github.com/thxnura/lablog-ios · github.com/thxnura/lablog-backend
Submitted	October 2026

Contents — 1 Project area · 2 Idea and features · 3 Architecture and design · 4 Offline access · 5 Constraint design · 6 Native hardware · 7 UI/UX flow · 8 Custom components · 9 Decision records, failure logs and AI use · 10 Testing · 11 Limitations · Appendix

1. Project area from the index number

```
Index number : MS26928210
Digits       : 2 + 6 + 9 + 2 + 8 + 2 + 1 + 0 = 30
Area         : 30 mod 5 = 0  →  Edtech
```

LabLog is an Edtech application, which matches the assigned area.

2. Project idea and features

2.1 The problem

University practicals are still recorded in paper lab books or loose Word files. That causes three problems:

- **Lecturers can't verify the work.** A tick on paper doesn't show that a step was done, done in the right order, or done at all.
- **Procedures get skipped or reordered.** Students jump ahead (for example, titrating before adding the indicator) and the mistake only shows in the final result.
- **Lab connectivity is poor.** Labs are often in basements or shielded rooms, so a cloud-only app stops working exactly where it is needed.

2.2 The solution

LabLog is an **offline-first iPhone lab book**. A student opens a lab, picks an experiment, and works through it as a **constrained checklist**:

- A step stays locked until its prerequisites are done.

- Steps that need **photo evidence** can't be completed without a photo.
- Steps with a **waiting time** (dissolving, incubating, timing oscillations) can't be completed until the time has passed. The countdown follows the student into the **Dynamic Island** and Lock Screen.

The finished record is **stamped with the student's location** and submitted. Everything is saved on the phone first and **syncs to the backend when a connection returns**. A lecturer signs in to the same app and gets a **Review** tab. It shows every submission with step times, photos, the observation and the location, from a lecturer-only API. Lecturers also **author the labs**: they create experiments step by step with the same rules (photo, wait, prerequisites), and choose which students can do each lab.

2.3 Why it is worthwhile

- **It turns a paper form into verifiable evidence.** Step order is enforced, every completion is timestamped, photos are attached to the step they prove, and the GPS stamp shows where the record was submitted.
- **It teaches as well as records.** Every step has a guide (how-to sub-steps, a safety note, the expected result), so the app supports learning mid-experiment rather than only logging it.
- **Offline is essential here, not a bolt-on.** Labs are where connectivity is worst, so the app is designed around working without a network.
- **It generalises.** Any procedural practical (chemistry, physics, biology, engineering workshops, clinical skills) is a graph of steps with conditions, so new experiments are data, not code.

2.4 Feature list

Feature	What it does	Brief requirement
Lab and experiment catalog	Browse labs and experiments; works offline from first launch (bundled catalog, refreshed from the API)	Backend, offline
Constrained step checklist	Steps unlock by precedence; photo and timer guards; explains *why* a step is locked	Constraint design
Step guide	How-to sub-steps, safety note, expected result; jump to blocking steps	UX
Photo evidence	Camera capture per step, stored on the device, uploaded later	Native hardware (camera)
Location stamp	One-shot GPS fix on submit, shown on a map receipt	Native hardware (GPS)
Live timers	Countdown dial in the app, Dynamic Island and Lock Screen Live Activity, "ready" notification, *Mark done* from the island	Native platform features
Offline outbox and sync	Local-first storage; automatic sync on reconnect, with retry and backoff	Offline + sync
Review and submit	Summary of what will be submitted; records become read-only	UX
Records and sync status	All records with progress and sync state; connection, account and outbox status	UX
Lecturer review	A Review tab for lecturers: submissions per experiment, with steps and times, photos, observation, step notes and map; backed by a lecturer-only API	Backend, UX

Feature	What it does	Brief requirement
Editing a draft	Retake a step's photo (remove it until the step is done), add a note to any completed step, or discard the whole draft; every change syncs, deletes included	Offline + sync, constraint design
Server address	Sync → Server points the app at the Mac on any network (a phone hotspot at a demo), with a connection test; no rebuild	Backend, UX
Accounts	Sign in first, then work offline; sign-out clears the phone and signing back in restores the student's records with their photos	Offline + sync, backend
Lecturer lab management	Lecturers create labs and experiments (steps with photo, wait and prerequisite rules, checked by the constraint engine in the app and with Kahn's algorithm on the server) and choose which students can do each lab	Constraint design, backend, UX

2.5 What makes it different

Most lab-book apps are digitised forms. LabLog models an experiment as a **dependency graph with guard conditions**, and one pure algorithm decides what a student may do next. The same rule is applied everywhere: the checklist, the step guide, the Dynamic Island's *Mark done* button and the submit sheet. On the server, ownership rules stop one student's data being overwritten by another's. The result is a lab book that is **hard to fake and still works with no signal**.

3. Architecture and design

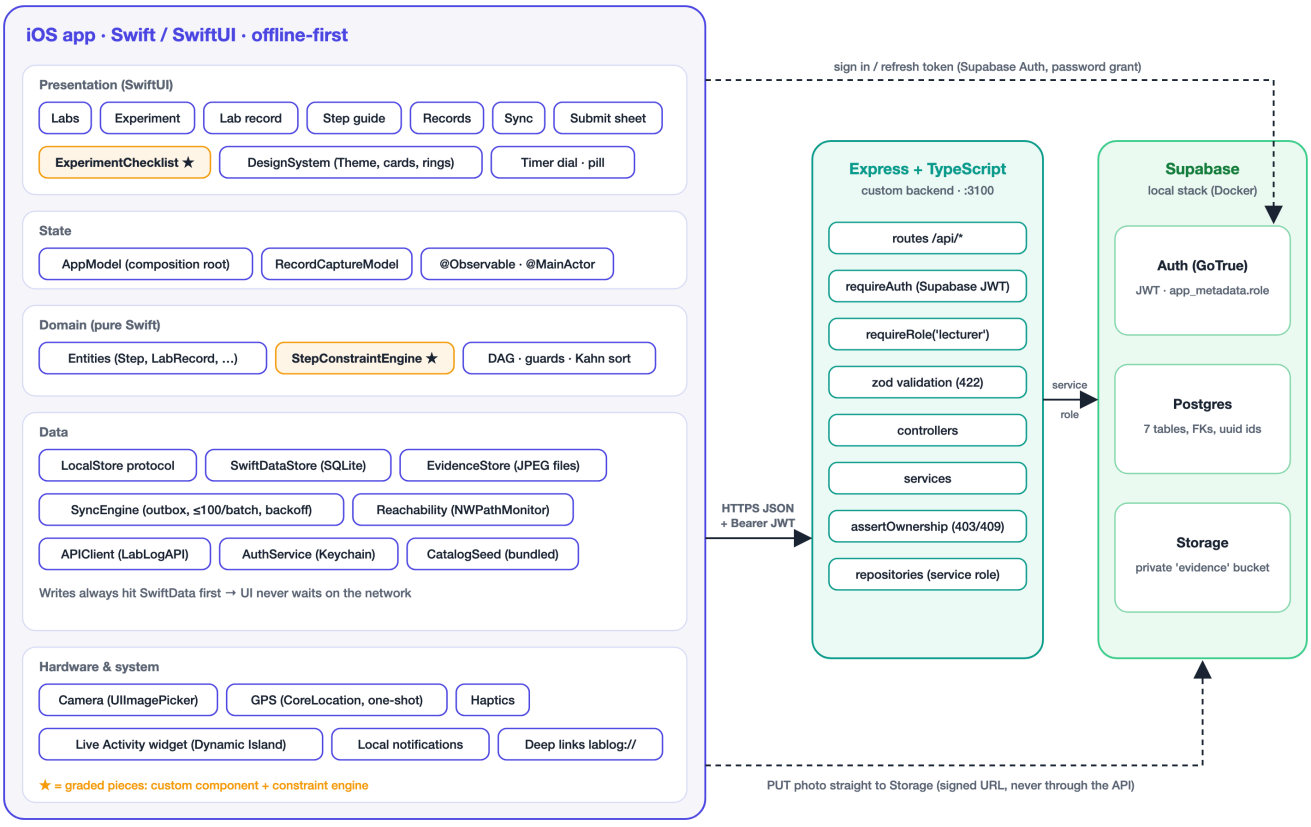


Figure 1 — Layers of the iOS app, the custom API, and Supabase. ★ marks the custom component and the constraint engine.

3.1 Layers and responsibilities

Layer	Contents	Responsibility
Presentation	SwiftUI screens, `ExperimentChecklist`, design system	Render state and turn taps into intents. No business rules.
State	`AppModel` (composition root), `RecordCaptureModel` (`@Observable`, `@MainActor`)	Hold screen state, call the domain and data layers, expose derived values (progress, next step, can-submit)
Domain	Entities, `StepConstraintEngine`	Pure Swift rules with no frameworks. The single source of truth for what a student may do.
Data	`LocalStore` → `SwiftDataStore`, `EvidenceStore`, `SyncEngine`, `Reachability`, `APIClient`, `AuthService`	Persistence, the outbox, networking and authentication
Hardware and system	Camera, CoreLocation, haptics, the Live Activity widget, notifications, deep links	Device capabilities, each behind a small wrapper
API (Express)	routes → middleware → controllers → services → repositories	Authentication, validation, ownership rules, data access
Supabase	Auth (JWT), Postgres, Storage	Identity, relational data, photo files

3.2 Major design decisions

All 30 decisions are recorded as ADRs (Context → Decision → Consequences) in `lablog-ios/docs/decision-records.md`. The ones that shape the design most:

ADR	Decision	Why
001	Native iOS with SwiftUI	First-class camera, location, Live Activities and SwiftData; a single demo platform
002	A custom Express API in front of Supabase, not direct database access from the app	A real service layer for validation, authorisation and business rules; the service-role key never ships in the app
003	The local store is the source of truth; the network is a background concern	The app must work fully offline in the lab
004	Client-generated UUIDs and idempotent upserts	Retrying after a dropped connection never creates duplicates
005	Photos uploaded through signed Storage URLs, not inside the JSON	Small sync payloads; photos never pass through the API
006 / 012	All step rules in one pure engine; step graphs validated with Kahn's algorithm	One place to reason about correctness; impossible experiments are rejected
008	Catalog bundled with the app, using the same UUIDs as the server seed	Usable offline on first launch, and records still link to the right server rows
009	A per-record `revision` counter guards in-flight edits	An edit made during a sync is never lost
013	Design system and a timeline checklist	Consistent visual language; the next step is always the most visible thing

ADR	Decision	Why
015	Timed steps as a Live Activity (Dynamic Island)	Students can leave the app during a wait
018	A local Supabase stack for end-to-end testing	Proves the full path on real Postgres, Auth and Storage
019	Lecturer role in `app_metadata`; ownership checks during sync	Closes record reading and record hijacking holes
020	In-app lecturer review, fetched live; the role only changes what the UI shows, and the API enforces it	Both roles demonstrable end to end; no trust placed in the client
021	The server address can change at runtime; the API points storage URLs at the host the app called	The demo works on any network, including a phone hotspot, with no rebuild
022	Discarding a synced draft sends a tombstone; the server deletes drafts only	Deletes are offline-first like every other write; submitted evidence is immutable
023	Photo retake (remove only until the step is done) and step notes; the payload carries the full photo set	Evidence can be corrected without breaking the photo guard or leaving stale files (ids compared in lower case since failure 018)
024	A quiet sync icon instead of an "Online" pill; a tap explains the state in one sentence	Being online is normal, so it isn't news; the unusual states are explicit
025	Host the API on Vercel and the database on Supabase, every table locked by RLS; iPhone builds use it (and, since ADR-030, the simulator and tests)	No dependence on the Mac's address; the anon key in the app can't read or write tables directly
026	Signing out clears the phone's records (warning first if any haven't uploaded)	One person's work is never shown to, or uploaded as, the next person on a shared phone
027	Sign in first, then work offline, like a messaging app (supersedes the optional sign-in of ADR-010)	Every record has a known owner from the start; offline work after the first sign-in is unchanged
028	Restore the student's records from the server after signing in (`GET /api/records/mine`), local copies winning	Sign-out can clear the phone without the student losing their history
029	Lecturers create labs and experiments (with step rules) and enrol students; tabs follow the role	The catalog is authored in the app; constraint checks run when an experiment is written, not only when it is done
030	Test against the hosted backend (Vercel + Supabase) with test-only accounts, cleaned up after every run; Docker optional	The tests check exactly what the phone uses, and don't depend on a local Docker stack that kept quitting (025, 029)

3.3 Data flow between the layers

LabLog uses **unidirectional data flow**. Views send intents up, and models and stores push state down.

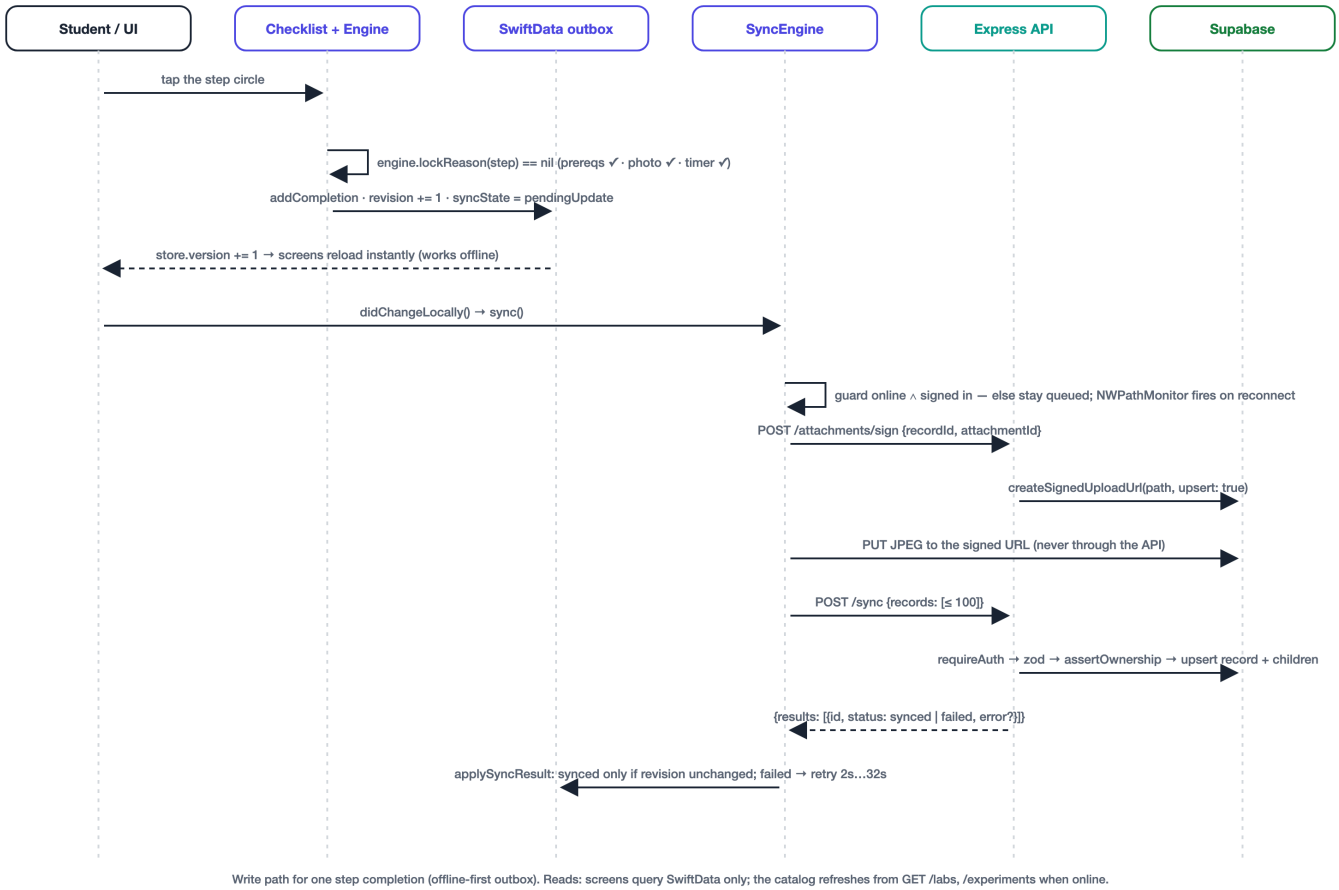


Figure 2 — What happens when a student completes a step: a local write first, then the outbox drains to the server.

Write path (Figure 2).

1. The student taps a step's circle in `ExperimentChecklist`.
2. The component asks `StepConstraintEngine.lockReason(for:context:)`. If the result is `nil`, it creates a `StepCompletion`.
3. The completion goes to `SwiftDataStore`. That increments the record's `revision`, marks it `pendingUpdate`, and bumps `store.version`.
4. Every screen that watches `store.version` reloads immediately, with or without a network.
5. `AppModel.didChangeLocally()` calls `SyncEngine.sync()`. If the phone is offline or signed out, the record simply stays queued; `NWPathMonitor` triggers the sync again on reconnect.
6. The engine uploads pending photos: `POST /attachments/sign`, then a `PUT` straight to Storage.
7. It then sends the records in batches of up to 100 (`POST /sync`). On the server, `requireAuth` checks the JWT, zod validates the payload, and `assertOwnership` blocks hijacking before the upserts run.
8. The per-item results come back, and `applySyncResult` marks a record `synced` only if its revision hasn't changed in the meantime.

Read path. Screens read only from SwiftData, through the `LocalStore` protocol, so the UI never waits on the network. When the phone is online and signed in, `SyncEngine.refreshCatalog()` pulls `GET /labs`, `/labs/:id/experiments` and `/experiments/:id` (the experiments concurrently), validates each step graph, updates the local catalog and drops labs the server no longer lists for this user (ADR-029). After each sync, `pullRecords()` fetches `GET /records/mine` and adds any of the student's records the phone lacks, with their photos (ADR-028).

Patterns used (from the lectures):

- **MVVM with observable models**: views bind to `@Observable` models.
- **Repository pattern**: the `LocalStore` protocol on the app; repositories on the server.
- **Dependency injection**: the `AppModel` composition root builds every service once and passes it to views through the environment.
- **Protocol abstraction for testability**: `LabLogAPI` lets the sync engine be tested against a fake backend.
- **Layered API**: routes → controllers → services → repositories.

3.4 How the source is organised, and why

```
lablog-ios/
  LabLog/
    App/           entry point, AppModel (composition root), config, tabs
    DesignSystem/  Theme tokens + shared components (cards, rings, chips)
    Features/      one folder per screen: LabList, ExperimentList,
                   ExperimentDetail, RecordCapture (capture, step guide,
                   submit sheet), Records, SyncStatus, Auth,
                   Review (lecturer), Manage (lecturer labs)
    Components/    ExperimentChecklist ⋆ (component, row, style), badges
    Domain/        Entities, Constraints/StepConstraintEngine ⋆ (pure Swift)
    Data/          Local (SwiftData store, catalog seed, evidence files)
                   Remote (API client, DTOs, Supabase auth, Keychain)
                   Sync (outbox, reachability)
    Hardware/      camera and location wrappers
    LiveActivity/  timer coordinator (activity + notifications)
  Shared/          compiled into app and widget (activity data, intent)
  LabLogWidgets/   widget extension: Dynamic Island + Lock Screen
  LabLogTests/     63 unit tests
  LabLogUITests/   6 end-to-end UI tests
  docs/            decision records, failure log, screenshots

lablog-backend/
  src/       routes → controllers → services → repositories,
             middleware (auth, roles, zod), dto
  db/        schema.sql, seed.sql, migrations/
  supabase/  local stack config
  test/      e2e.test.ts (20 tests)
  scripts/   local setup, demo users
```

Why this structure:

- **Feature folders** keep a screen's view and model together, so a change touches one place.
- **The domain layer has no framework imports**, so the most important rules can be unit-tested in milliseconds and reused by the app, the guide and the Live Activity intent.
- **The data layer sits behind protocols** (`LocalStore`, `LabLogAPI`), so SwiftData or the network can be swapped or faked.

- `Shared/` **exists only because the widget extension is a separate binary.** It holds the minimum both need.
- **The backend mirrors the same separation** (transport → logic → data), so each layer is testable and the business rules sit in services, not controllers.

3.5 Backend API

Method	Path	Access	Purpose
GET	`/api/health`	public	Liveness check
GET	`/api/labs` · `/api/labs/:id/experiments` · `/api/experiments/:id`	signed in	Catalog, including the step graph and guides. Students see the open course labs and the labs they're enrolled in; any other lab is 403
POST	`/api/attachments/sign`	student	Signed upload URL for a photo (deterministic path, upsert)
POST	`/api/sync`	student	Batch upsert of records and their children; result per record. `deleted: true` deletes a draft (tombstone); photos missing from a record's set are removed
GET	`/api/records/mine`	student	The student's own records (drafts and submitted) with signed photo URLs, to restore a phone after sign-in (ADR-028)
GET	`/api/records?experimentId=`	**lecturer**	Submitted records with student email and 1-hour signed photo URLs
GET · POST · PUT	`/api/manage/labs` · `/api/manage/labs/:labId/experiments` · `/api/manage/experiments/:id` · `/api/manage/labs/:labId/students` · `/api/manage/students`	**lecturer**	Create labs and experiments (step graph checked with Kahn's algorithm, 422 on a loop), edit an experiment in place (steps keep their ids; 409 if a removed step has student work), and choose which students can do each lab (ADR-029)

Data model (Postgres):

- Catalog: `labs` 1–* `experiments` 1–* `steps`. Each step has `prerequisite_step_ids uuid[]`, `requires_photo`, `min_duration_seconds` and its guide content. `labs.created_by` is null for the open course labs; `lab_enrolments` (lab, student) decides who sees a lecturer's lab.
- Records: `lab_records` (owned by `auth.users`) 1–* `step_completions`, `observations` and `attachments`.
- All record ids are client-generated UUIDs.
- Storage URLs that the API hands to the app (signed uploads and lecturer photo links) use whatever host the app called. The Mac's address can then change without touching the backend (ADR-021).

---

4. How offline access works


LabLog is **local-first**. The phone is the source of truth while the student works, and the server catches up.

Technique	How it is implemented
Usable offline from first launch	`CatalogSeed` bundles 2 labs, 3 experiments and 13 steps with the same UUIDs as `seed.sql`, versioned so updates reach existing installs
Local persistence	SwiftData models mirror the domain structs; every action writes locally first
Outbox	Each record carries a local `syncState` (`pendingCreate`, `pendingUpdate`, `synced`, `failed`); every non-synced record is in the outbox
No lost edits	A `revision` counter: a sync result marks a record synced only if no edit happened while the request was in flight
Safe retries	Client UUIDs and upserts by id; the photo path is deterministic and uploads overwrite (`upsert: true`)
Photos offline	`EvidenceStore` keeps downscaled JPEGs (1600 px, quality 0.7) in Application Support, by relative file name, until uploaded
Reconnect detection	`NWPathMonitor`: the offline → online transition triggers a catalog refresh, then a sync
Retry policy	A failed sync retries with exponential backoff (2, 4, 8, 16, 32 s); reconnecting or *Sync now* retries immediately
Efficient sync	Photos upload first; records go in batches of up to 100; the server reports success or failure per record, so one bad record doesn't block the rest
Sign in once, then offline	The app opens on sign-in (ADR-027); after that the session lives in the Keychain, so the app works with no connection, and the token refreshes a minute before expiry
Deletes offline too	A discarded draft the server already has becomes a **tombstone**: hidden everywhere, kept in the outbox, sent as `deleted: true`, purged once the server confirms. A draft never sent is just deleted (ADR-022)
Edits as full state	A record's payload lists its complete photo set, so a retaken or removed photo is dropped on the server too (rows and files)
Any network	The server address can be changed in the app at runtime; the session survives because it's the same backend (ADR-021)
Sign-out	Returns to the sign-in screen and clears the phone's records, photos and timers; if any haven't uploaded, the student is warned first (ADR-026)
Restore after sign-in	After each sync the app fetches the student's own records and adds the ones it lacks, with their photos; local records always win (ADR-028)

What the student sees: a sync icon on every main screen that stays quiet when everything is synced and becomes specific when it isn't (an upload cloud with the number of waiting records, *Offline*, or a warning). Tapping it explains the status in one sentence, with the one action that helps: *Sync now*, or *Sign in* if the session has ended while the app is open, which opens the sign-in sheet right there (ADR-024). There is also a sync state on every record, and a Sync screen that leads with one clear status ("Working offline", "3 records ready to sync", "Everything is synced"). Its main button is whatever unblocks sync next (*Sign in* or *Sync now*).

Evidence:

- **Unit tests:** 18 store tests and 9 sync-engine tests cover outbox rules, the revision guard, photo-before-record ordering, per-item failures, tombstones, photo removal and notes, restoring a student's records after sign-in, clearing them on sign-out, and the offline and signed-out behaviour. Four more check what the sync icon shows in each state.
- **Backend tests:** 20 end-to-end tests against real Postgres, Auth and Storage, run against the deployed API on Vercel (ADR-030), including a tombstone retried twice, a retake replacing the stored photo, ids in the app's upper-case form keeping their photo (failure 018), and storage URLs following the caller's host.
- **UI test:** it signs in, completes steps with a photo, and waits for "Everything is synced". The record, both step completions and the photo were then confirmed in the database. It then signs out (Records is empty), signs back in and finds the record restored (Figure 9).

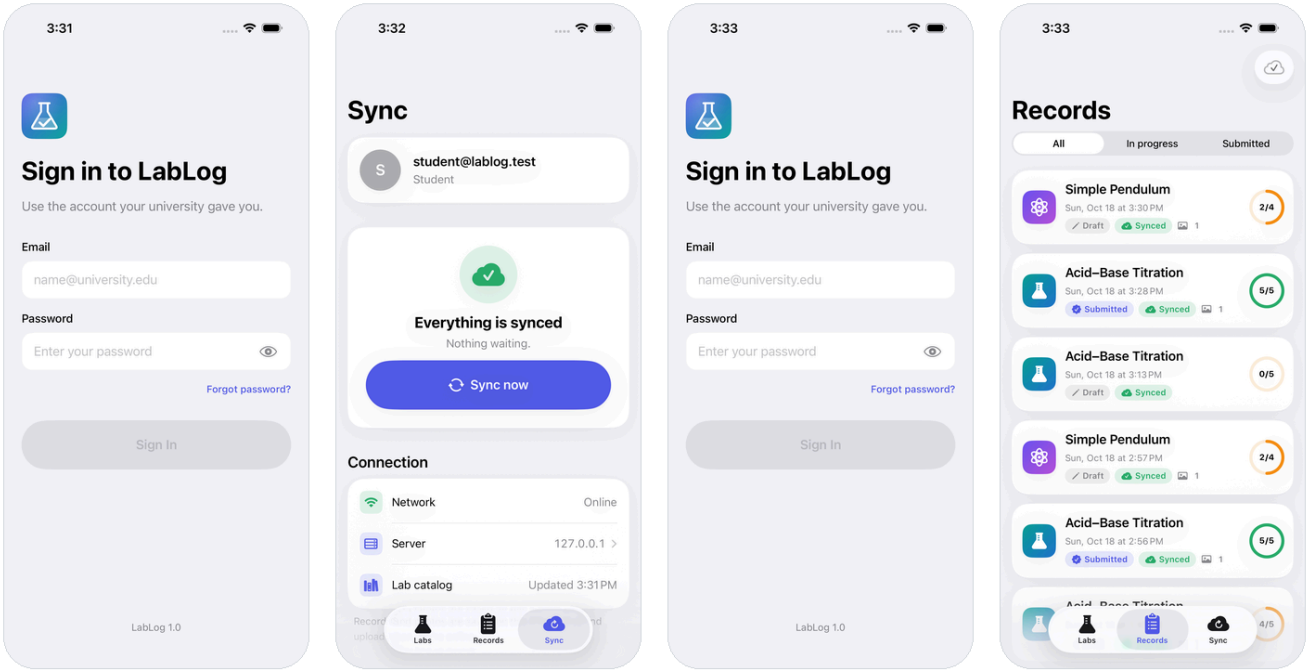

Sign in (first screen) | Synced to the server | Signed out: back to sign-in | Signed in again: restored

Figure 9 — The app opens on sign-in (Supabase Auth); after work, the outbox drained to the server; signing out returns to sign-in and clears the phone; signing in again restores the student's records from the server (ADR-028).

5. Constraint design algorithms and principles

5.1 Model

An experiment is a **directed acyclic graph of steps**. Each step lists its prerequisites (`prerequisiteStepIds`) and may carry **guard conditions**:

- `requiresPhoto`: a photo must be attached to this step.
- `minDurationSeconds`: a minimum wait, measured from the latest prerequisite's completion, or from the record's start when the step has no prerequisites (when the step unlocked).

The seeded *Acid–Base Titration* experiment is a real branching graph. Steps 1 and 2 can be done in either order, and Step 4 needs **both** Step 1 and Step 3.

5.2 The unlock algorithm

```
lockReason(step, ctx):
  missing ← step.prerequisites − ctx.completed
  if missing ≠ ∅                          → prerequisitesIncomplete(missing)   // precedence
  if step.minDuration ≠ nil:
     anchor ← max(completionTime[p] for p in step.prerequisites)           // latest prereq
              ?? recordStartedAt                                           // else: its start
     remaining ← ceil(minDuration − (now − anchor))
     if remaining > 0                      → timerPending(remaining)          // time guard
  if step.requiresPhoto ∧ step ∉ ctx.photos → needsPhoto                     // evidence guard
  return nil                                                                 // unlocked
```

The order of the checks is deliberate. Precedence is reported first, so the student always sees the real blocker. The timer is anchored on the *latest* prerequisite, so a parallel branch can't shorten a wait. A timed step with no prerequisites is anchored on the record's start: it originally fell back to *now*, which restarted the wait on every check, so it never ran down. The seeded experiments never had a timed first step; a lecturer's did, and I found it on my phone (failure 028). The engine is a pure `struct`: given the same steps, completions, photos and time, it returns the same answer, which makes it easy to test.

The engine also provides:

- `reachableSteps(…)`: what the student can work on next. It drives "Next: Step 3 · …".
- `isComplete(…)`: whether every step is done. It gates submission.
- `message(for:)`: a human-readable reason, such as "Complete Step 1, Step 3 first" or "Wait 2:30".

5.3 Graph validation (Kahn's algorithm)

Step graphs come from the server, and a typo could create a cycle (A needs B, B needs A) or a prerequisite that doesn't exist. Either would make an experiment impossible to finish.

`validate(_:)` reports self-dependencies, unknown prerequisites and cycles. Cycles are found with **Kahn's topological sort**: repeatedly take a step whose prerequisites are all placed, lowest `order` first so the result is deterministic. Any steps never placed lie on or behind a cycle. `refreshCatalog()` skips an experiment that fails validation, so a student never receives an impossible one.


Since lecturers write experiments in the app (ADR-029), the same check also runs **when an experiment is written**. The editor only offers earlier steps as prerequisites, so a loop can't be built by construction, and it still runs `StepConstraintEngine.validate` on the draft before *Save* is enabled. The server checks the graph again with Kahn's algorithm (`step-graph.ts`) and refuses a loop or an unknown step with 422. Editing keeps each step's id, so students' completions and photos stay attached, and removing a step a student has completed is refused with 409.

As written, it costs O(V·(V+E)), because it rescans the step list each round. That is trivial for a lab experiment (≤ 20 steps). A priority queue would make it O((V+E) log V).

5.4 Principles applied

1. **Precedence constraints.** A topological order is enforced, so Step 4 can't be reached before Steps 1 and 3.
2. **Guard conditions.** Evidence and time preconditions are first-class, not ad-hoc `if`s.

3. **Invariant centralisation (single source of truth).** The checklist, the step guide, the Dynamic Island's *Mark done* intent and the submit gate all ask the same engine, so no screen can disagree with another.
4. **Fail-safe, explanatory UI.** Locked steps stay tappable and say *why* they're locked (with a warning haptic); the guide lists the blockers and jumps to them.
5. **Defence in depth.** The server re-validates every payload with zod (422 on bad input), checks ownership (403 or 409), and limits batch size.
6. **Validate before use.** Graph validation rejects an impossible configuration before it reaches a student: when a lecturer saves it, on the server, and again when the catalog arrives on the phone.
7. **Invariants survive edits.** "A completed photo step has a photo" holds after the fact as well. A completed step's photo can be retaken but not removed, and submitted records refuse every edit, in the store and (for deletes) on the server.

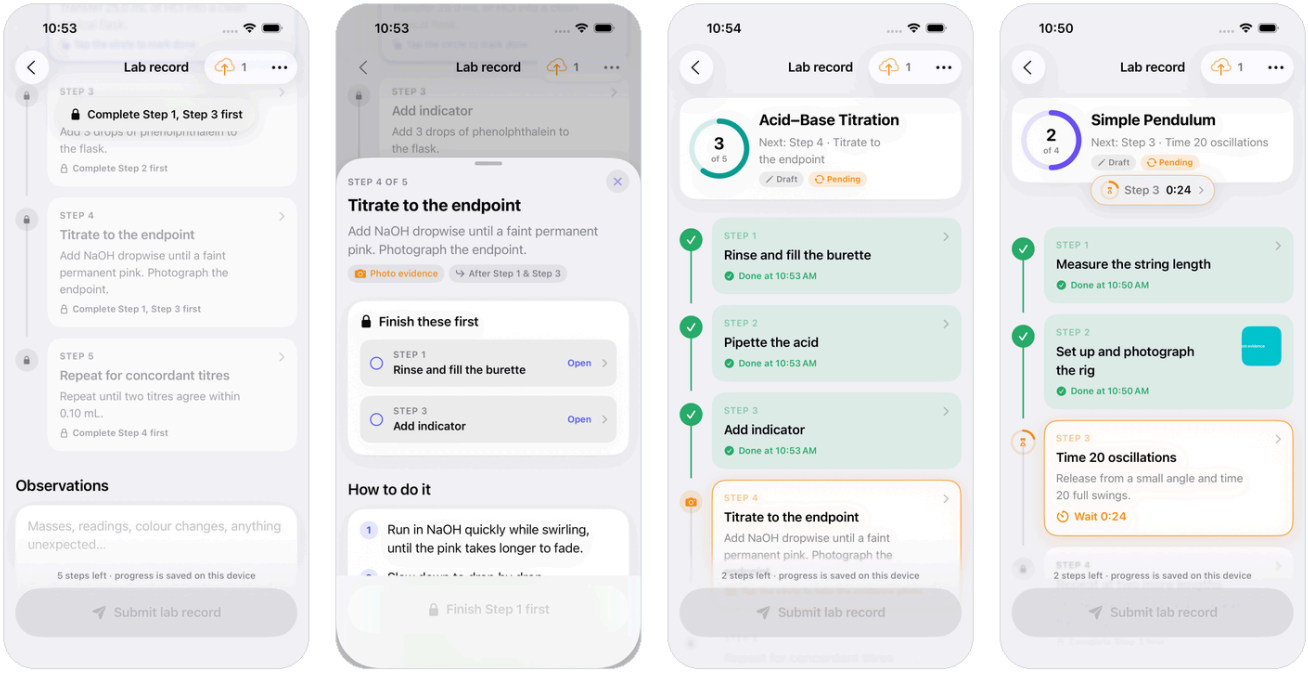

Locked step explains why | Guide lists the blockers | Photo guard | Timer guard + pill

Figure 4 — A locked step explains itself; the guide lists blocking steps; photo guard; timer guard with a live countdown.

5.5 Designing for a constrained device

The app also follows the principles of designing for limited battery, network, storage and attention:

Constraint	Design response
Unreliable network	Local-first writes, outbox, batching (≤ 100), per-item results, backoff instead of tight retries
Bandwidth	Photos downscaled to 1600 px and JPEG 0.7 (about 100 KB); uploaded directly to Storage, never through the API
Battery	No polling: sync is driven by events (`NWPathMonitor`, local changes); the timer view only ticks while a timer runs; the Live Activity countdown is drawn by the system with no app updates; GPS is a one-shot fix at 100 m accuracy with a 10 s timeout
Storage and memory	Evidence kept by relative file name; thumbnails generated with `preparingThumbnail`, not full-size images

Constraint	Design response
Privacy and permissions	Camera, location and notification permission are asked only when the feature is first used (submit, photo, first timer), never at launch
User attention	One primary action per screen; capture mode hides the tab bar; Reduce Motion is respected

Tests: 13 constraint-engine unit tests. They cover multi-parent prerequisites, guard order, timer anchoring (including a first step's wait running from the record's start), messages, reachability, topological order, cycle detection, dangling and self edges, and the validity of every bundled experiment.

6. Native hardware integration

Capability	Implementation	Purpose	If unavailable
Camera	`UIImagePickerController` wrapped in `CameraPicker`; images saved by `EvidenceStore`	Photo evidence attached to a specific step; a photo automatically completes a photo-guarded step when the step is otherwise unlocked	Falls back to the photo library (Simulator); permission text set in `NSCameraUsageDescription`
GPS	`LocationService` (CoreLocation): one-shot `requestLocation`, 100 m accuracy, 10 s timeout, async continuation	Location stamp on submission, shown on a MapKit receipt	The record still submits with no location ("Not available")
Haptics	SwiftUI `sensoryFeedback`	Success when a step completes, warning when a locked step is tapped, a level change when a timer ends, success on submit	No effect
Live Activities / Dynamic Island	Widget extension with `ActivityKit`; `Text(timerInterval:)` and `ProgressView(timerInterval:)`	The countdown continues outside the app; *Mark done* runs a `LiveActivityIntent` in the app process, still checked by the engine	Skipped if Live Activities are disabled
Notifications	`UNUserNotificationCenter`, time-interval trigger	"Step 3 is ready" when the wait ends; tapping it deep-links to the step guide	Skipped if permission is denied




Figure 7 — The compact Dynamic Island (ring and countdown); expanded (step, progress, ready time, Guide and Mark done); the Lock Screen Live Activity with the "ready" notification.

7. UI/UX flow

7.1 Navigation


The app opens on a sign-in screen (ADR-027). Students then get three tabs (**Labs · Records · Sync**); lecturers, who don't do practicals, get **Review · Labs · Sync**, where their Labs tab manages labs, experiments and enrolment (ADR-029). The stacks are shallow: Labs → lab → experiment briefing → lab record. A student is never more than three taps from the checklist. While capturing, the tab bar hides (focus mode), and *Submit* is pinned to a floating bottom bar.

7.2 Screen by screen

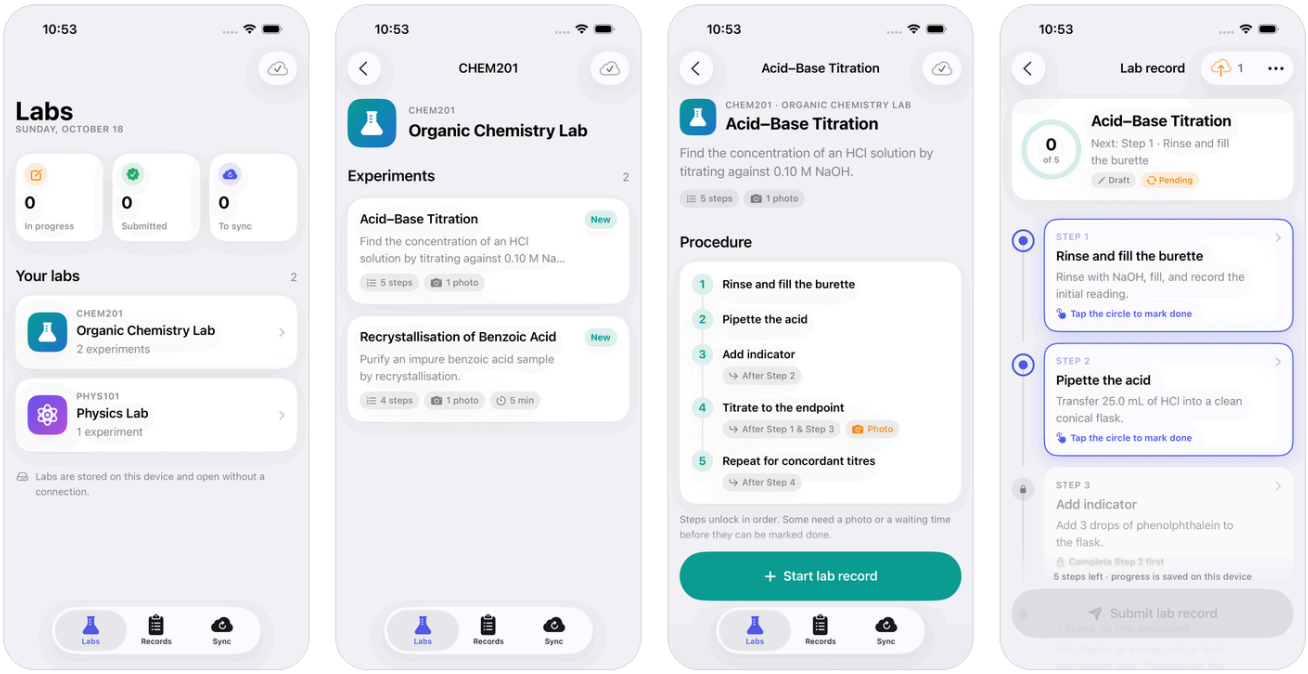

1. Labs dashboard | 2. Lab experiments | 3. Experiment briefing | 4. New lab record

Figure 3 — The Labs dashboard (date, stats, lab cards); a lab's experiments with their demands (steps, photos, waits) and progress; the experiment briefing with the procedure and its constraints, plus a sticky "Start lab record" button; a new record.

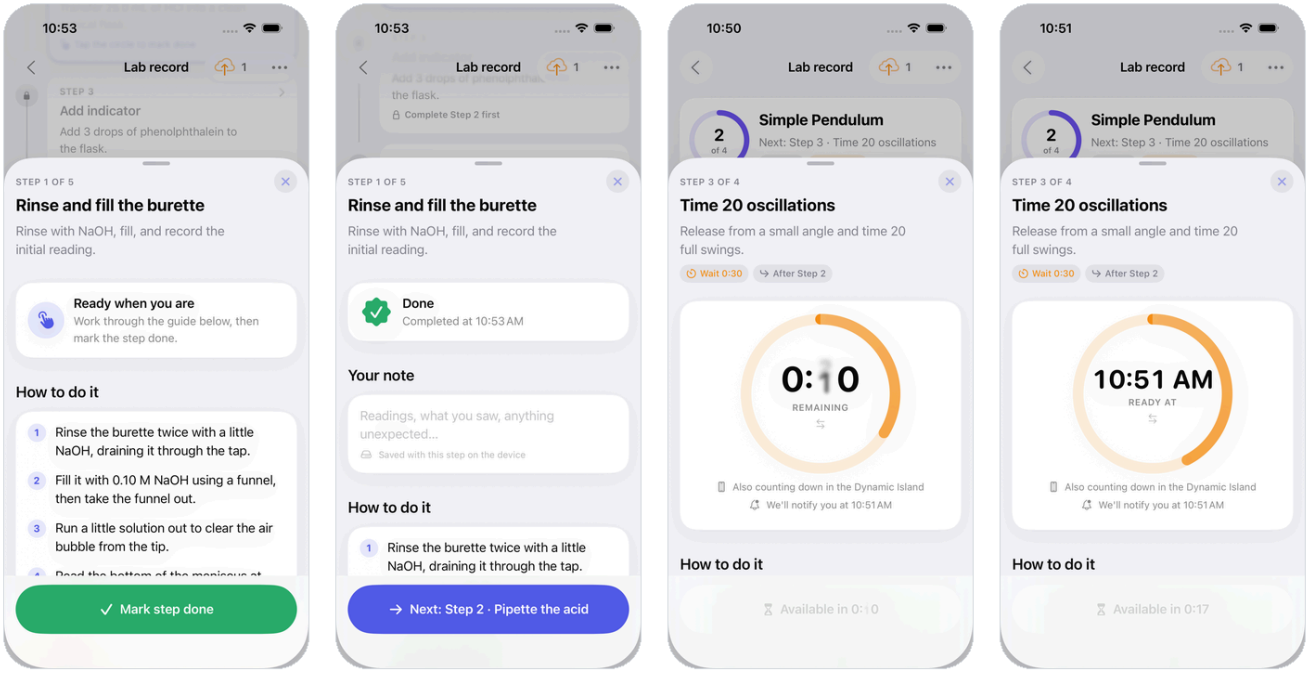

Step guide | Done → next step | Timer dial (remaining) | Tap: ready-at time

Figure 5 — The step guide (how-to, safety, expected result, one primary action); after completion it offers the next step; the timer dial (tap to switch between remaining time and ready-at time).

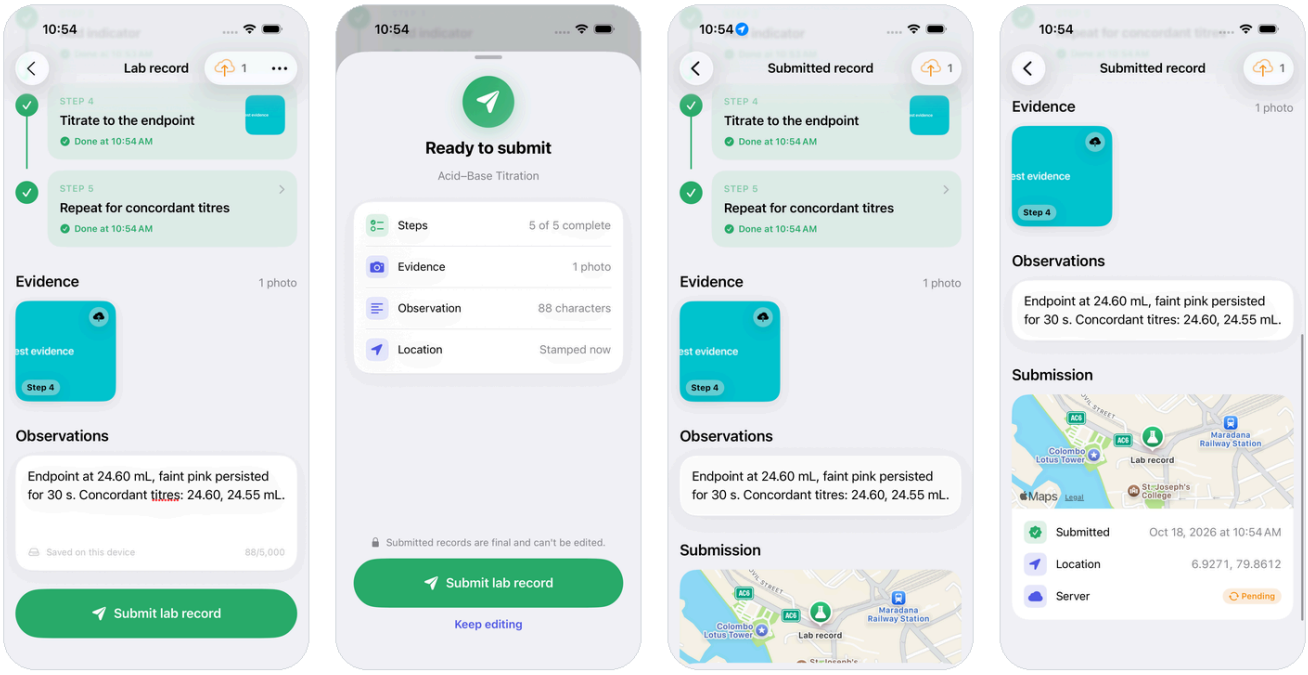


Figure 6 — All steps done; the review-and-submit sheet summarising what will be handed in; the animated "Submitted" state; the read-only receipt with a GPS map.



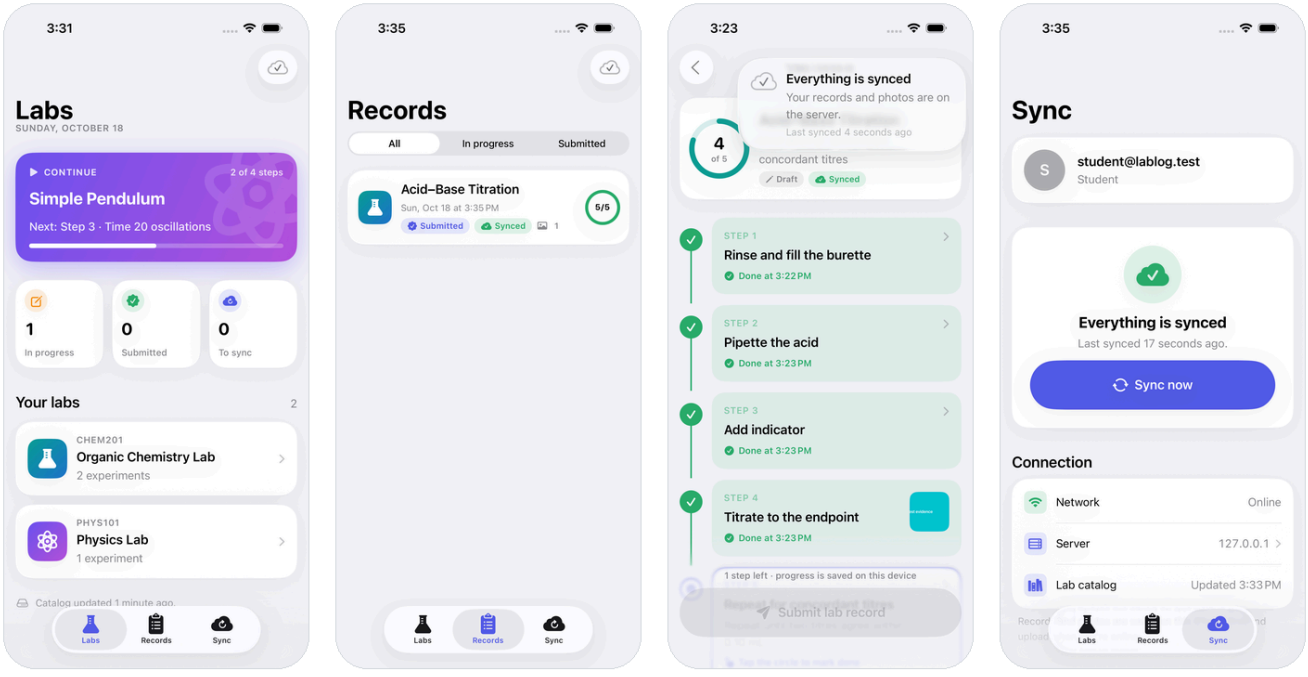


Figure 8 — Home with a "Continue" card for the current draft; Records with filters, progress rings and sync badges; the toolbar's sync icon, which explains itself in one sentence when tapped and offers the action that helps (here everything is synced, so it only says when; signed out with work waiting, it offers Sign in); the Sync screen: the account, the sync status with Sync now, and the connection.

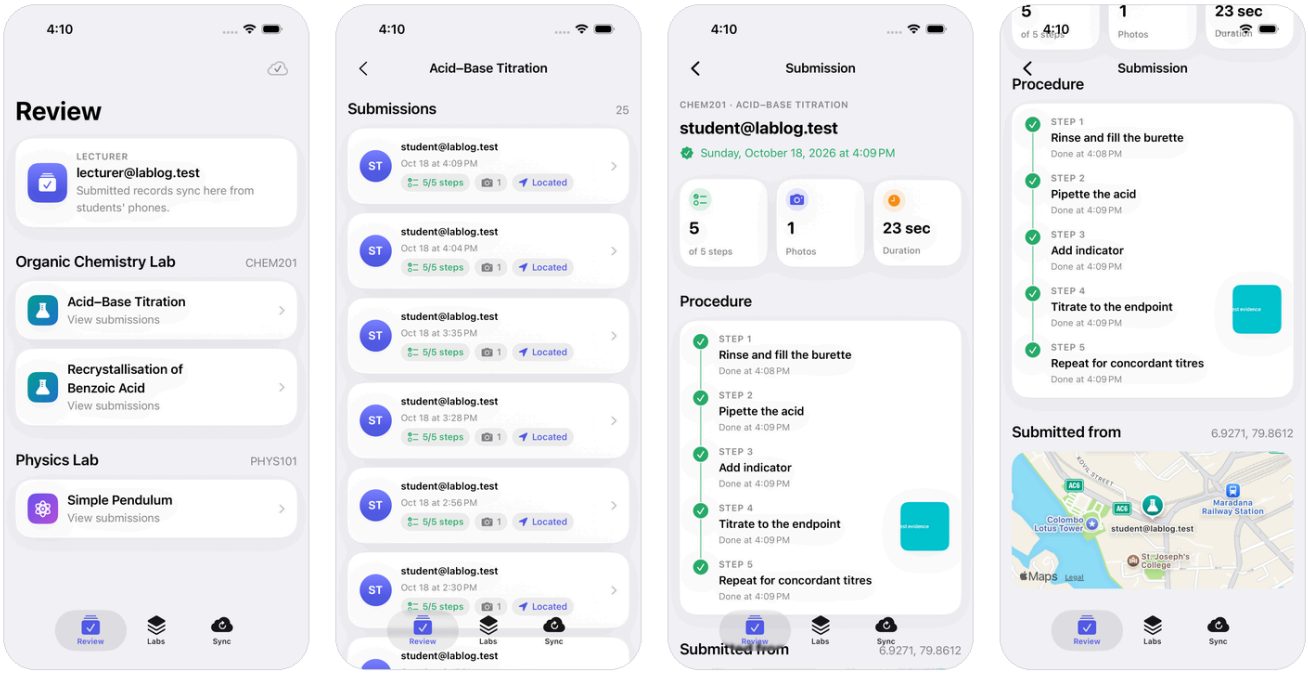


Review tab (lecturer) | Submissions | Submission detail | Procedure + location

Figure 10 — Signed in as a lecturer: the Review tab; an experiment's submissions; a submission's detail (steps done, photos, time taken, the step timeline with completion times and evidence); and where it was submitted. Lecturers have no Records tab: their tabs are Review, Labs and Sync (ADR-029).

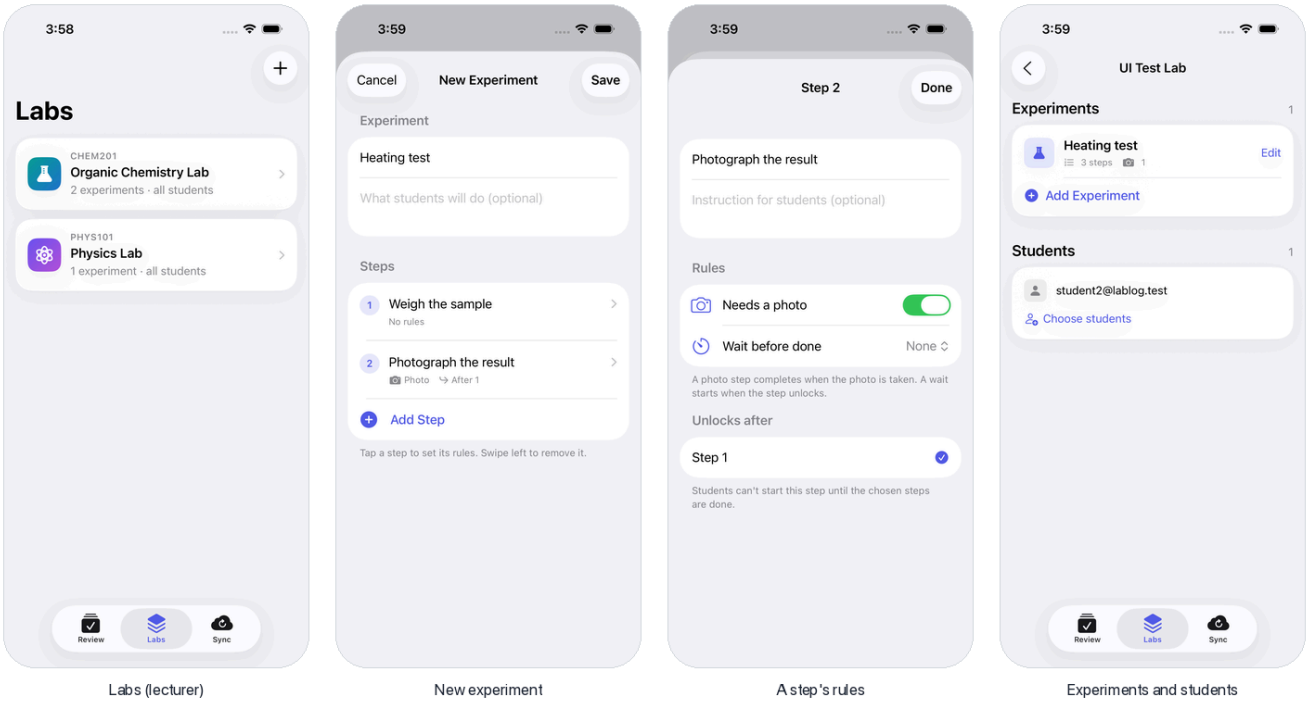


Labs (lecturer) | New experiment | A step's rules | Experiments and students

Figure 14 — A lecturer's Labs tab: the course labs (open to all students) and their own; a new experiment, each step summarised by its rules; a step's rules (needs a photo, a wait, and the earlier steps it unlocks after, which the constraint engine checks before saving); and a lab with its experiment (3 steps after an edit) and the one student enrolled in it (ADR-029).

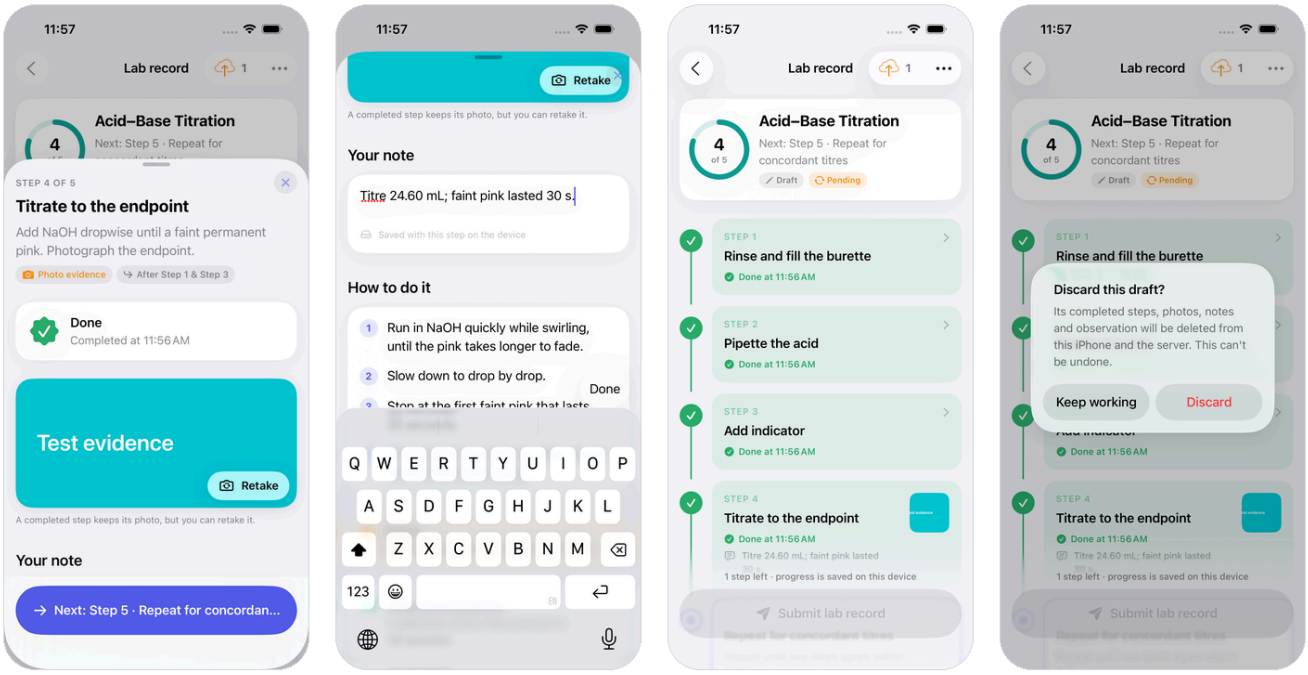

Retake on the photo | A note on the step | The note in the checklist | Discard the draft

Figure 11 — Retake sits on the photo itself (a completed step keeps a photo, so there is no Remove); a note on the step, with the action bar out of the keyboard's way; the note under its step in the checklist; discarding the draft, with a confirmation that says what will be deleted.

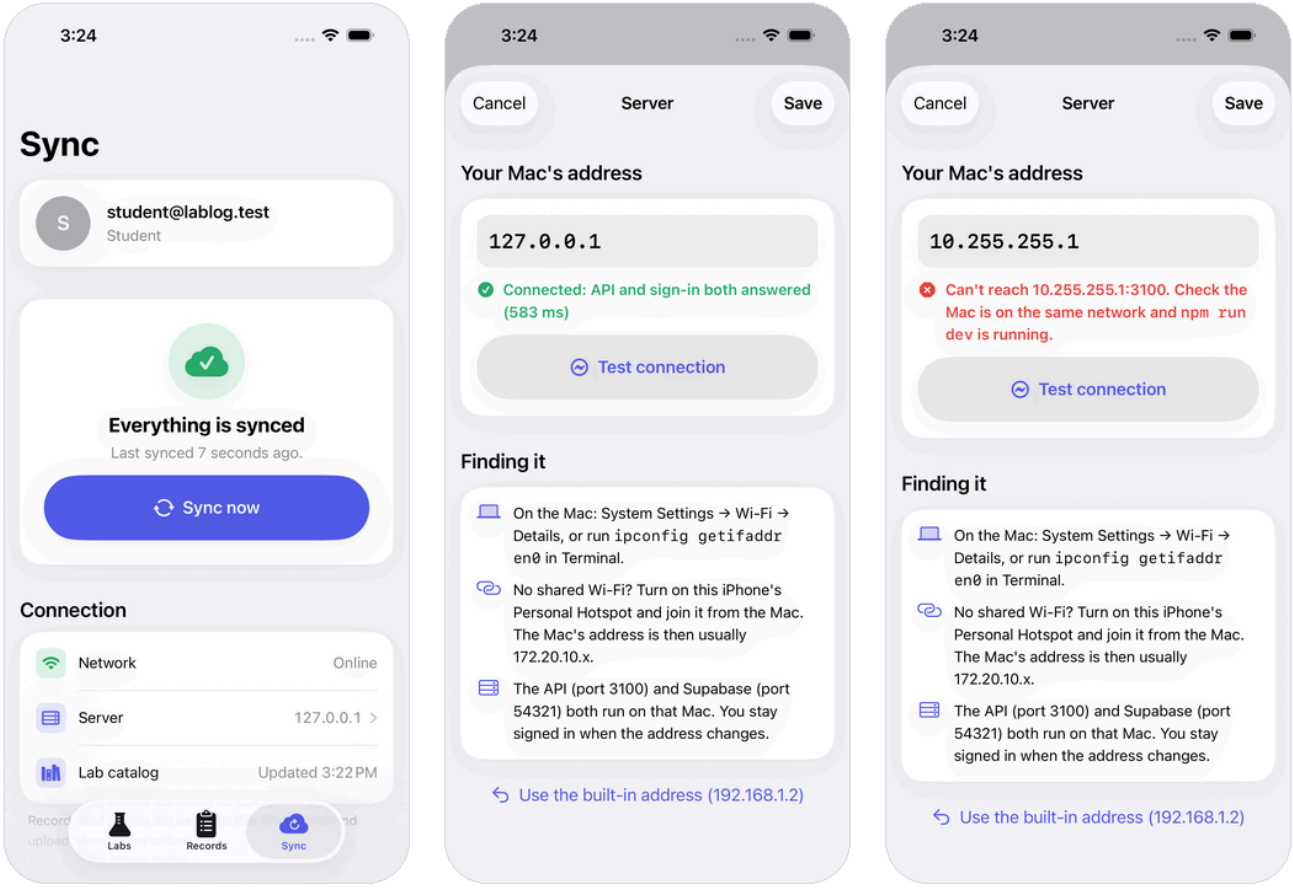


Sync: the server row | Address answers | Address doesn't answer

Figure 12 — Sync shows which server the app is using; the Server sheet tests an address against both the API and sign-in before saving; an address that doesn't answer says what to check.

7.3 Why these UI/UX choices

- **The next action is always the most visible thing.** Available steps are outlined and lifted, locked steps recede, and finished steps collapse to one line.
- **Constraints are explained, not just enforced.** Every lock has a reason, and the guide links to the blocking step.
- **Built for a student mid-experiment** (gloves, divided attention). The tap targets are large, typing is minimal (the photo completes the step, and the email field focuses itself when sign-in opens as a sheet), haptics confirm actions, and the timer follows the student out of the app.
- **Irreversible actions are confirmed with context.** The review sheet shows exactly what is being submitted, rather than a generic "Are you sure?".
- **Offline is never alarming.** The sync icon is quiet when all is well and says *Offline* (with the number of waiting records) when it matters; tapping it explains, reassuringly, that everything is saved on the iPhone (ADR-024).
- **Follows Apple's Human Interface Guidelines.** System fonts and SF Symbols; critically damped springs, with bounce kept for completions; materials; dark mode; VoiceOver labels and hints; Reduce Motion support.
- **Original assets.** The app icon and every illustration are drawn in code, and the colours come from my own palette.

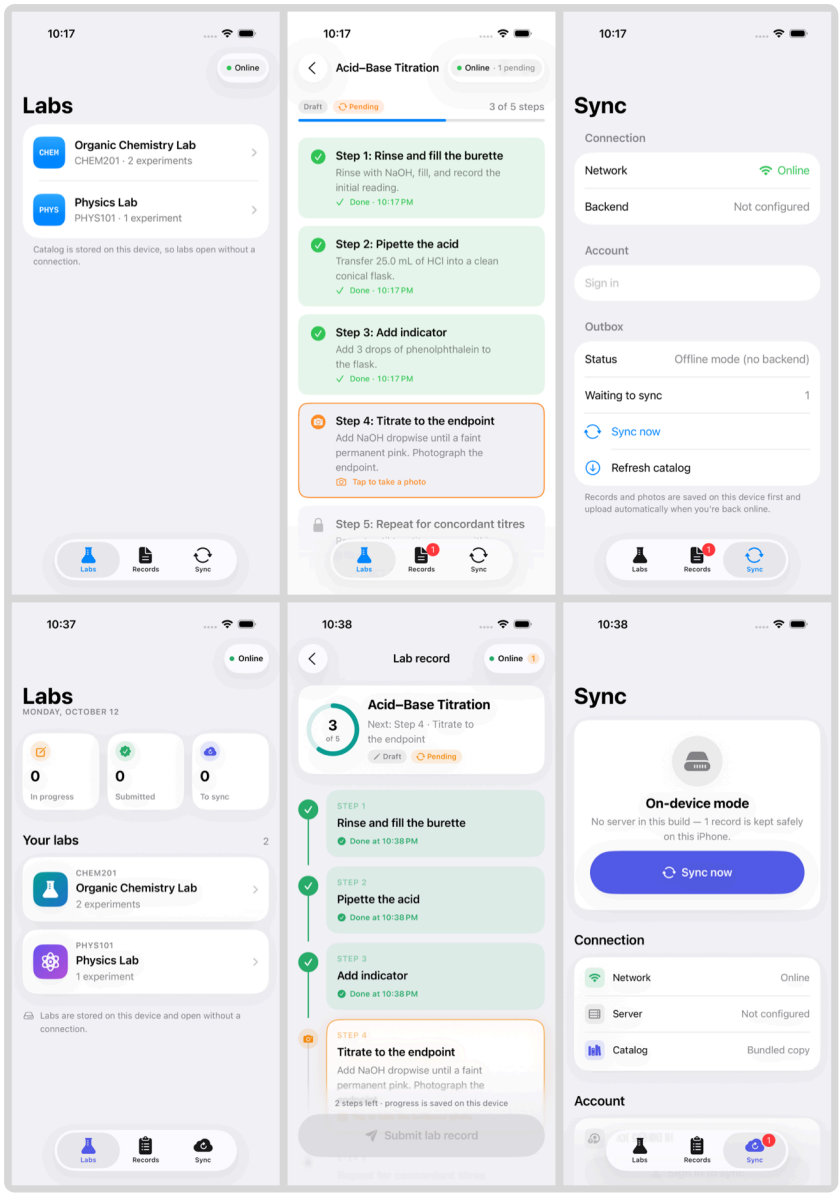

The first working build (top) used stock lists. The redesign (bottom) introduced the design system and the timeline checklist (ADR-013).

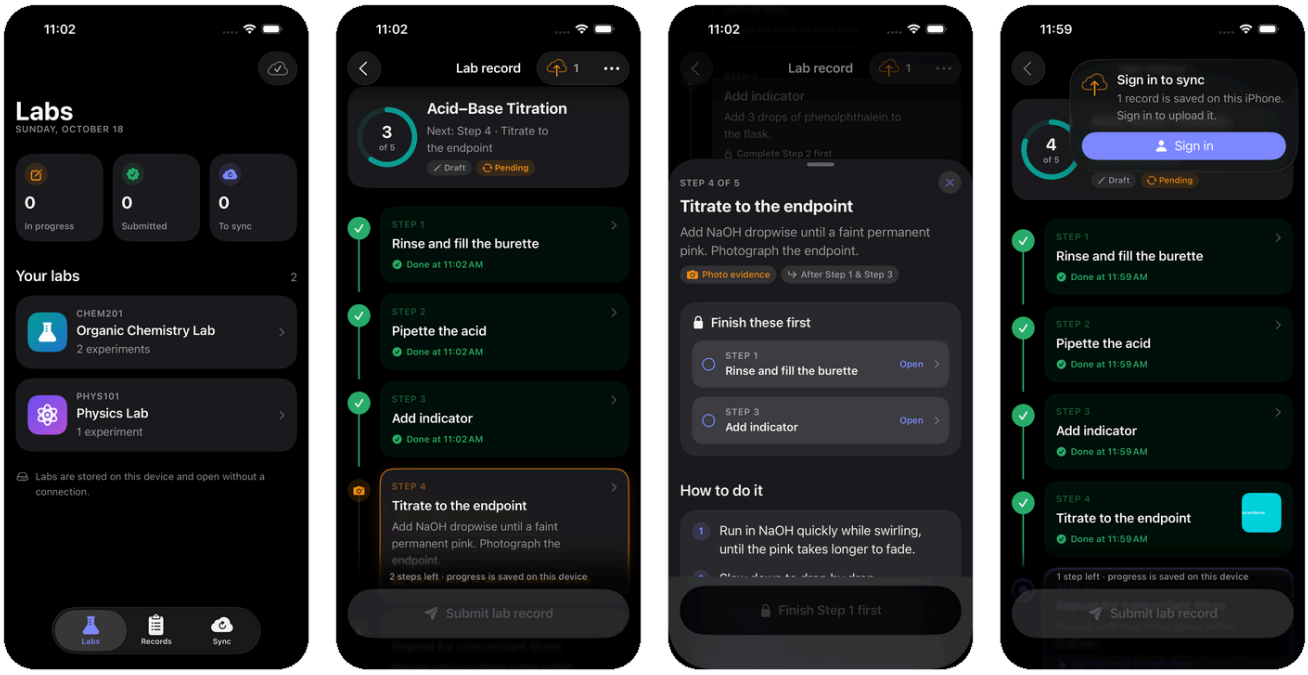


Figure 13 — The same screens in dark mode. The app follows the system appearance: colours are semantic (system backgrounds and label colours), white text only sits on coloured fills, and card shadows are dropped in the dark. I checked this by running the UI tests with the simulator in dark appearance (16 Oct), and again after the sync icon replaced the Online pill (18 Oct, last panel). The 30 screenshots of the second run were reviewed for contrast, with nothing to fix.

8. Custom components

8.1 `ExperimentChecklist` (the main custom component)

A reusable SwiftUI view that renders an experiment as a **vertical timeline** and enforces the step rules through an injected `StepConstraintEngine`. The component never decides locking itself; it asks the engine.

Properties (inputs)

Property	Type	Meaning
`steps`	`[Step]`	The steps to render (shown in `order`)
`completions`	`Binding<[StepCompletion]>`	Two-way bound completion state
`recordId`	`UUID`	The record that new completions belong to
`startedAt`	`Date?`	When the record began: a timed step with no prerequisites counts its wait from here (failure 028)
`photoStepIds`	`Set<UUID>`	Steps that already have a photo
`photoThumbnails`	`[UUID: UIImage]`	Optional evidence thumbnails shown on their step
`isEditable`	`Bool`	`false` for a submitted record (read-only)
`engine`	`StepConstraintEngine`	The rules (injectable, so it can be swapped in tests)

Property	Type	Meaning
`style`	`ChecklistStyle`	Theme: spacing, radius, node size, tints, collapse behaviour

Events (outputs)

Event	Fires when
`onStepCompleted(Step, StepCompletion)`	A step was completed; the parent persists it, and successors re-evaluate automatically
`onPhotoRequested(Step)`	The circle of a photo-guarded step was tapped; the parent opens the camera
`onLockedStepTapped(Step, String)`	A locked step was tapped; the reason text is passed for display
`onStepSelected(Step)?`	A step card was tapped; the parent opens the step guide. If `nil`, a card tap behaves like a circle tap

A completion's `note` (in the `completions` binding) is shown under its step. The row view, `ChecklistRow`, gained a `note` property for it, so the component needed no new input.

Row states: *locked* (with reason), *available*, *needs photo*, *timer pending* (live ring and countdown), *completed* (with time and thumbnail).

How it works:

1. Each render builds a constraint context from `completions`, `photoStepIds`, `startedAt` and the current time, and maps every step to a row state through the engine.
2. A `TimelineView` re-renders once a second, but only while a timer guard is counting down.
3. When a countdown ends, the component fires a haptic.
4. Tapping a node runs the quick action (complete, request a photo, or explain the lock); tapping a card selects the step.
5. Completing a step appends to the binding and raises `onStepCompleted`, and the next render unlocks the successors.

Rows have VoiceOver labels, values and hints. The node and the card are separate accessibility elements.

```
ExperimentChecklist(
    steps: model.steps,
    completions: $model.completions,
    recordId: model.recordId,
    startedAt: model.record?.createdAt,
    photoStepIds: model.photoStepIds,
    photoThumbnails: thumbnails,
    isEditable: model.isEditable,
    onStepCompleted: { _, completion in model.persist(completion) },
    onPhotoRequested: { step in requestPhoto(for: step) },
    onLockedStepTapped: { _, reason in show(reason) },
    onStepSelected: { step in guide = GuideTarget(id: step.id) }
)
```

8.2 Other custom components

Component	Purpose
`ChecklistRow`	One timeline row: status node, connector, card; five visual states
`StepGuideSheet`	The guide: blockers you can jump to, interactive `TimerDial`, the single next action
`TimerDial` and `LiveTimerPill`	A countdown ring (tap to switch to ready-at time) and a floating live pill under the header
`SubmitReviewSheet`	Review → submitting → success, with an animated confirmation
`SyncStatusButton`	The toolbar sync icon: its look comes from a pure `SyncIndicatorState`, and a tap opens a one-sentence explanation with the action that helps (*Sync now* or *Sign in*)
`ProgressRing`, `DisciplineIcon`, `StatTile`, `MetaChip`, `InfoRow`, `SyncStateBadge`	Design-system building blocks
`StepTimerLiveActivity`	Dynamic Island (compact, minimal, expanded) and Lock Screen layouts
`ReviewView`, `SubmissionsView`, `SubmissionDetailView`	The lecturer's review flow: stats, step timeline, photos from signed URLs, location map
`ManageLabsView`, `ExperimentEditorSheet`, `StepEditorSheet`, `StudentPickerSheet`	The lecturer's lab management: lab cards, an editor for new and existing experiments whose step rows summarise their rules, a step's rules (photo, wait, unlocks after), and a student picker with search, select all and a clear selected state
`SignInView`	The first screen: the app icon, labelled fields, *Forgot password?*, and *Change server address* only when a local server can't be reached

9. Decision records, failure logs and AI use

9.1 How the process was recorded

- **Decisions:** ADR-001 to ADR-030 in `lablog-ios/docs/decision-records.md` (summary in §3.2).
- **Failures:** `lablog-ios/docs/failure-log.md`, with the exact error text, an image, the cause and the fix. Raw logs sit next to each image in `docs/screenshots/`.
- **AI interactions:** every prompt is quoted exactly as typed (§9.3), with what it produced and whether it worked.

9.2 Failure log


#	Date	Failure (exact error)	Cause	Fix
001	12 Oct	`'Observable' is not a member type of struct 'LabLog.Observation'`	My domain type `Observation` shadowed Apple's Observation module, which the `@Observable` macro expands into	Renamed it `LabObservation`

#	Date	Failure (exact error)	Cause	Fix
002	12 Oct	`EXC_BREAKPOINT (SIGTRAP)` in SwiftData; the test host crashed 16 times	The store kept the `ModelContext` but not its `ModelContainer`, which was freed	The store holds the container strongly
003	12 Oct	Badge wrapped as "Pend-ing", then showed only an icon; a row 4× too tall	SwiftUI `Label` adapts its layout to its container	Explicit `HStack { Image; Text }`
004	12 Oct	`XCTAssertTrue failed` — the UI test tapped the floating Submit bar	The test tapped an element's centre, which sat under the bar	Scroll into the clear band, then tap
005	12 Oct	Both UI tests: `XCTAssertTrue failed`; the Close button carried the id `step-guide`	A container's accessibility identifier overrode its children's	Identifiers on leaf elements only; combine before overlaying
006	12 Oct	`Failed to tap "start-record"` and a missing timer pill	A tap during a navigation push; the island press deep-linked into the guide	Wait for screens; handle the guide
007	12 Oct	The submit dialog appeared as a popover pointing at a step card	A `confirmationDialog` anchored to a large container	A custom Review & submit sheet
008	14 Oct	`listen EADDRINUSE: address already in use :::3000`	Another project's dev server held port 3000	The local API runs on 3100
009	14 Oct	Flaky sign-in test (three different errors)	Tab-bar overlap, sheet animation timing, keyboard focus	Auto-focus the email field; waits; hierarchy dump on failure
010	14 Oct	Receipt showed "Location: Not available"; then `XCTAssertTrue failed` twice	The restarted simulator had no simulated location (the app correctly submitted without one); a dropped tap during a transition; the test missed the 1.6 s success state	Tests pin the location (`XCUIDevice.location`), retry navigation taps, and watch for success and prompts together. GPS confirmed: "6.9271, 79.8612"
011	14 Oct	Lecturer UI test: tab tap ignored after launch; `XCTAssertTrue failed` (Submit disabled)	Cause of the ignored tap not found; Step 5 tapped while completed rows were re-laying out	Verified tab switching (title check, one retry); confirm each step completed
012	16 Oct	`XCTAssertTrue failed` waiting for `step-note`; the UI hierarchy showed Step 5's guide	The new Retake button sat under the sheet's floating "Next: Step 5" button, so the tap went to Next (the same class as 004, and a real UX flaw)	Retake and Remove float on the photo itself; the test asserts Retake is hittable and the guide stays on Step 4


#	Date	Failure (exact error)	Cause	Fix
013	16 Oct	(Tooling) My keystrokes "ow" + Return landed in TermShot's Terminal window: `zsh: command not found: ow`	TermShot took the keyboard focus while I was typing, and its window ended in a live shell	It waits for keyboard and mouse to go idle, ends in a real shell with an empty keymap, and retakes the shot if a key was pressed. The faulty capture was overwritten, so there is no image
014	16 Oct	`Failed to tap "Discard" Button: … Multiple matching elements found`	iOS 26 exposes an alert's button to XCUITest twice	The test takes the first match inside the alert
015	16 Oct	Both sign-in UI tests: `XCTAssertTrue failed – sign-in against Supabase Auth`	The router moved the Mac from 192.168.1.8 to .88 mid-session; the app was built with the old address (the demo-day risk, for real)	UI tests launch with `-LabLogServerHost 127.0.0.1`; on a phone, Sync → Server (ADR-021)
016	16 Oct	Full suite: titration `XCTAssertTrue failed` (Submit disabled) and sign-in `XCTAssertTrue failed` (no sheet)	A step circle tapped mid-layout never completed; one dropped tap	Every step is confirmed (`completeStep`); the sign-in tap retries once
017	18 Oct	UI tests failed in a different place each run: `step-1 not found`, `start-record not found`, `Neither element nor any descendant has keyboard focus`	The Mac was overloaded (load average near 28) and the simulator dropped taps and focus; the app itself was idle at 0% CPU	Test helpers confirm each tap, guide and keyboard and retry; the next full run passed. Four later dropped taps of the same kind (017b to 017e, the last a *Sign Out* tap) got the same treatment
018	18 Oct	The lecturer saw **0 Photos** on new submissions; Storage logs showed each photo uploaded, then `DELETE` 171 ms later; a new e2e test: `+ [] – [ 'ae7580fa-…' ]`	The ADR-023 prune compared ids as strings: the app sends UUIDs in upper case, Postgres returns lower case, so the photo just sent looked "missing" and was deleted. Backend tests used lower-case ids, and the UI tests only checked "synced"	The API lower-cases every id when validating; a new e2e test sends upper-case ids; confirmed through the app (photo in Postgres and Storage)
019	18 Oct	`failed – step-1 not found`: "Start lab record" opened a "Submitted record" screen with `0, of 0` steps	Two SwiftUI tasks, one creating the screen's model and one loading it; when the load ran first nothing loaded, and an empty model reads as not-a-draft	One task creates and loads the model; the next full run passed
020	18 Oct	(UX, from my iPhone) The sync popover said "Sign in to sync" but tapping did nothing; then `sign-in-popover not found` in the new UI test	Sign-in was left to the Sync tab, so the one state that needs an action had none; the popover's container identifier replaced the new button's (as in 005)	A **Sign in** button opens the sign-in sheet in place; `.accessibilityElement(children: .contain)` on the container

#	Date	Failure (exact error)	Cause	Fix
021	18 Oct	(From my iPhone) Sign-in spun for 20 s, then a request timeout; `curl` to the old address: `000`, to the new one: `200`	The Mac's IP changed again (.88 → .2); the error didn't say what to do	Sign-in gives up after 8 s and says the server can't be reached, with **Change server address** in place; unit test; build default .2
022	18 Oct	`sign-in-popover not found`; the popover said "Everything is synced" in a test that never signs in	A lecturer session left in the Keychain by a test that failed before signing out	UI-test launches sign out, as they already clear timers and notifications
023	18 Oct	Lecturer UI test: `Server returned 500: The connection to the database timed out` (the app showed "Couldn't load submissions")	The local Supabase stack under load (Docker VM shared with another project, load average about 11)	None in code; passed on the rerun; another reason for hosting (§11)
024	18 Oct	(From my iPhone) After signing out, the previous student's records were still on the phone	Records were never tied to an account on the device; unsent ones would have uploaded under the next account	Sign-out clears the phone's records, warning about unsent work (ADR-026); unit test and UI check
025	18 Oct	All 5 UI tests: `failed – signed in (sign-in against Supabase Auth) not found`; backend tests: `fetch failed`; `docker ps`: daemon not running	Docker Desktop had stopped, taking the local Supabase stack down	Restarted Docker; the stack recovered and all tests passed
026	18 Oct	(From my iPhone) After signing back in, earlier submissions were missing	The app only pushed records, and sign-out now clears the phone	`GET /api/records/mine` and restoring after every sync, photos included (ADR-028)
027	18 Oct	Three UI tests: `XCTAssertTrue failed`, `timer-dial not found`	The shared test student had dozens of server records; after sign-in they were restored, so "Start lab record" reopened an old draft	Flow tests launch with `-UITestSkipRestore` (debug only); the sign-in test still checks the restore
028	18 Oct	(From my iPhone) A lecturer's timed first step never counted down; the Dynamic Island didn't match	With no prerequisite, the wait was measured from *now*, so every check restarted it	The wait runs from the record's start (engine, Live Activity, checklist `startedAt`); two unit tests
029	18 Oct	Lecturer UI test: `Server returned 401: Invalid or expired token`; later four UI tests: `signed in … not found`; `docker ps`: daemon not running	Docker Desktop quit three more times mid-run (15:04, 15:13, 15:54; its log shows an orderly quit each time, not a crash)	Restarted Docker; the hosted backend doesn't depend on it


#	Date	Failure (exact error)	Cause	Fix
030	18 Oct	`XCTAssertTrue failed – the edit is saved` (lecturer UI test)	The test read the edited experiment's row while the save was still in flight: the row already existed behind the sheet, so its wait ended at once (the screen recording shows Save spinning)	The test waits for the row's label to change; it passed, with the rest of the suite
031	18 Oct	(Tooling) `scripts/test-hosted.sh:30: read-only variable: status`	In zsh, `status` is a built-in, read-only name for the last exit code, so assigning it stopped my new script before the tests ran	Renamed the variable; the next run passed

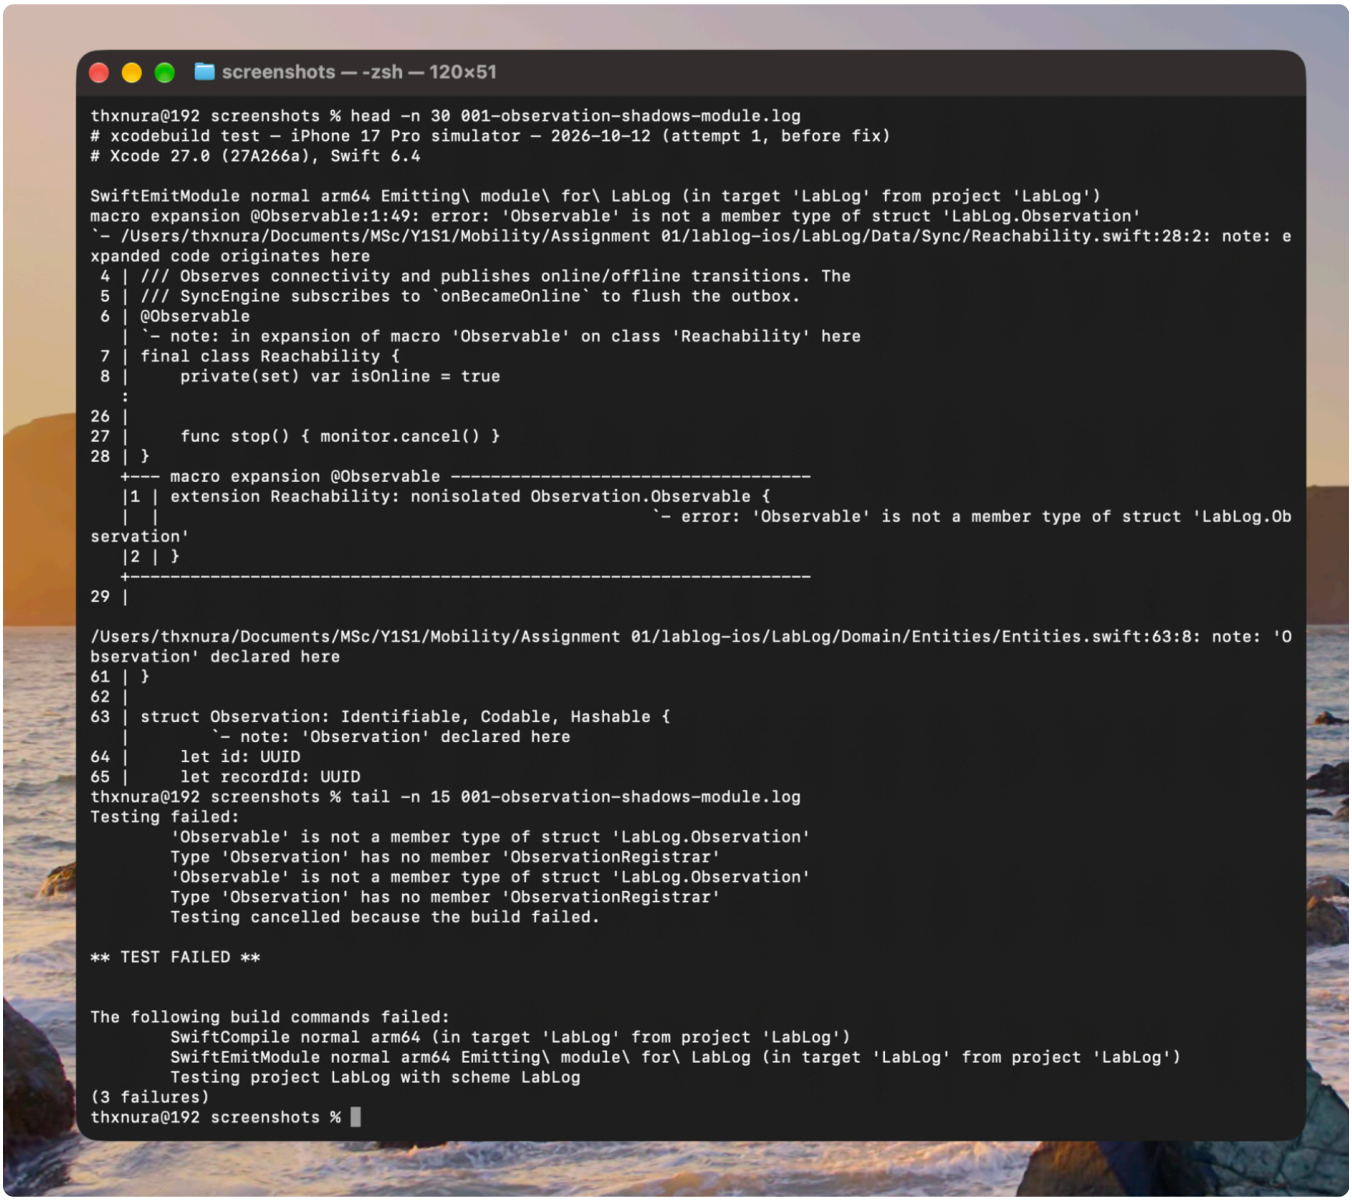

Failure 001 — the first compile of the generated Xcode project.

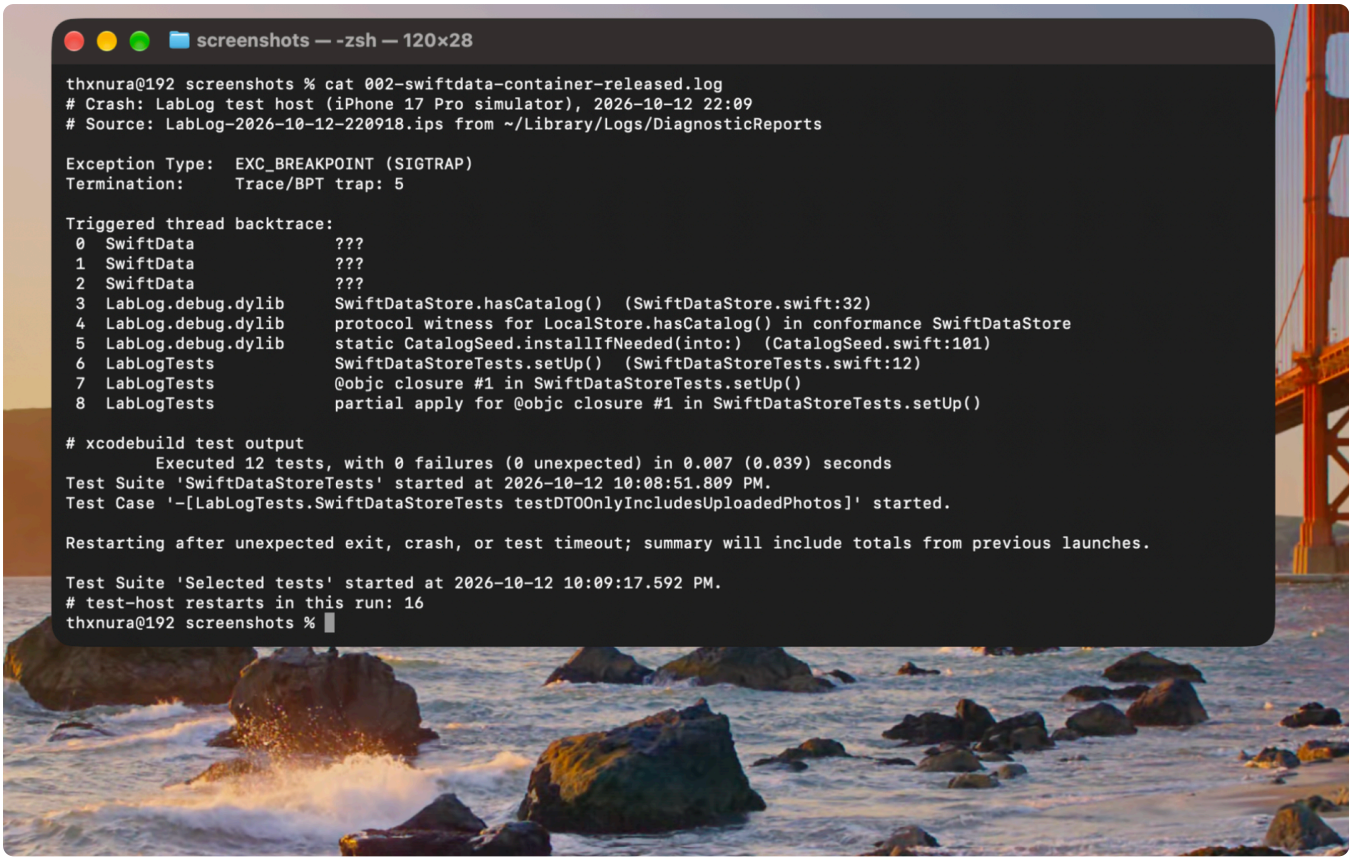

Failure 002 — the crash report and test output for the SwiftData container lifetime bug.

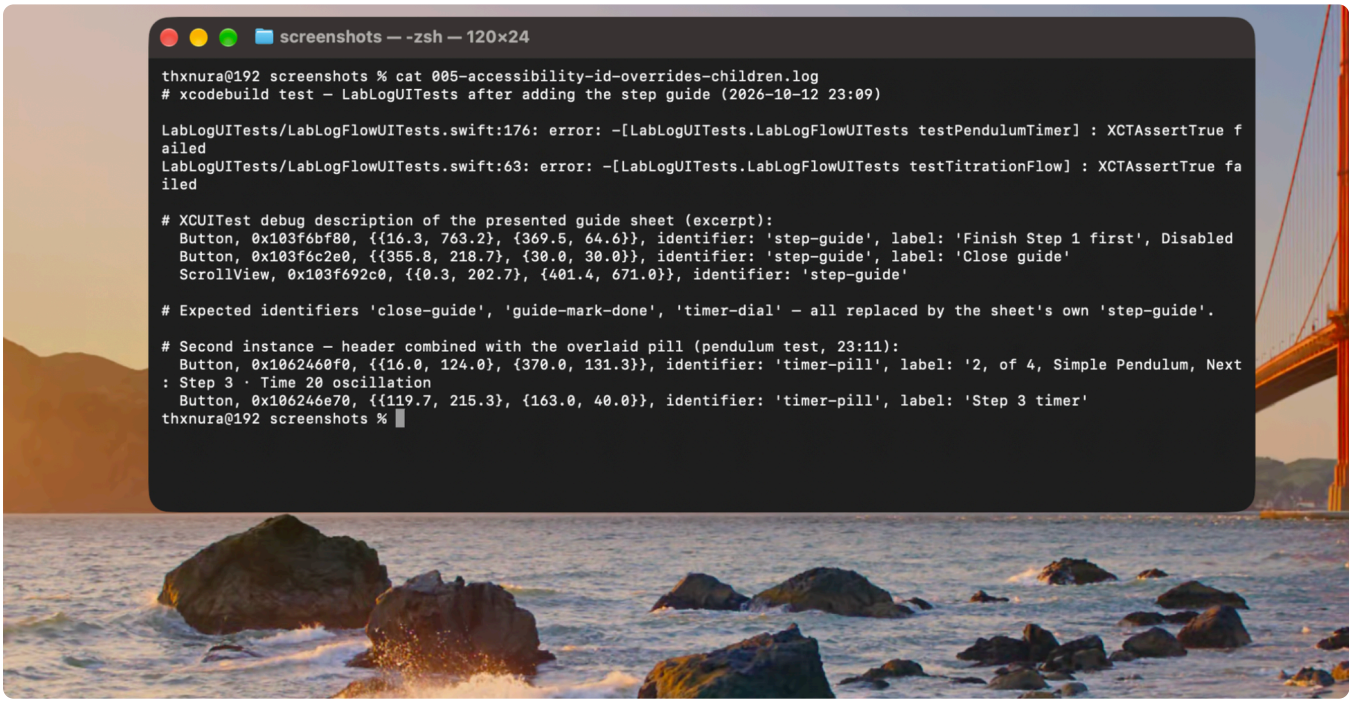

Failure 005 — the debug description shows the Close button carrying its container's identifier.

Each error image is a Terminal window showing the log saved when the failure happened (excerpts of the `xcodebuild` output and crash reports, with my notes in `#` lines). The `.log` files sit beside the images in the repository. Two images (029b, 030b) are frames from the screen recording XCUITest keeps of each UI test. Failures 024, 026 and 028 were reported in words from my iPhone, so they have no image; each is covered by the tests named in its fix.

9.3 AI use and prompts

I used **Claude Code (Claude Opus 5.5)** as a pair programmer. I set the direction and requirements, reviewed the output, ran the app on my iPhone, and reported problems back. The AI generated much of the code, the tests and the documentation, and diagnosed failures. Every prompt is listed exactly as I typed it:

#	Exact prompt	What it produced	Result
1	"check the status of this project and install the app in my iphone"	Status review, the Xcode project, signing, and installation on my iPhone	Partially (failure 001)
2	"it shows scaffold ready, wire lab view and other stuff, build the full app, and if u detect errors, those should be screenshoted and make a doc"	The full app (store, sync, auth, screens, camera/GPS wiring, tests) and a build log	Partially (failure 002; a race in its record screen surfaced on 18 Oct as failure 019)
3	"i get this error repetatively" (with a screenshot of the crash dialog)	A diagnosis from the crash report and the fix	Worked
4	"its look too much basic, make ui ux more like other porffesional app design with apple design skills"	The design system and a redesign of every screen	Partially (failures 003, 004)
5	"yes and u shoeud authorize as me, do not include u"	Commits under my own identity	Worked
6	"add more interactibe animations like when timer goes show them in dynamic island and show interactive timer, and when we click step add step guide as well"	The Live Activity, timer dial, step guides and deep links	Partially (failures 005, 006)
7	"yes rewrite that commits and remove all clade coauth and add my photo and name"	A history rewrite with authorship preserved	Worked
8	"this submit dialog look ugly, fix it, also make dynamic island more good with details and make proffesional"	The review sheet and a richer Live Activity	Worked (fixed failure 007)
9	"yes continue and do next build"	The local Supabase stack, end-to-end tests, lecturer role, ownership checks, and real sync from the app	Partially (failures 008, 009)
10	"what more we have to build"	A gap analysis against this brief	Worked
11	"ok do next ones"	This report draft, its diagrams and figures, demo notes, and the in-app lecturer review; checking the figures exposed failure 010	Partially (failures 010, 011); report is a first draft for my review
12	"check what we more have to build"	A second gap check: submission tasks, the risk of a LAN-only backend at a demo, optional small builds	Worked
13	"ask me the points should be filled in Appendix D"	Questions on batch mates, assets and libraries; Appendix D filled from my answers	Worked

#	Exact prompt	What it produced	Result
14	"termiansl erros all looks like styles neh, for this lets do this, make small mac app, not inside this repo. make it inside documemnt/thanura and when we fiving logs, inte rendered same to mac terminal and we can capture ss from it", then "look its huge different", "now this is too mcuh perfect, adding shadow and all…", "i said u to take ss like this" (with my own screenshot)	TermShot, a small Mac app that shows a saved log in a real Terminal window on my desktop and saves the screenshot; the error images were re-taken with it in the style of my own screenshot	Partially (window title, margin marks, inactive windows, a captured keystroke (failure 013) and two style rounds, all fixed)
15	"make word document"	`LabLog-Report.docx`, generated from the same Markdown (headings, tables, code, 14 images, page numbers)	Worked after two conversion bugs were fixed (lost spaces between links, a skipped image)
16	"so whats next we have to build"	A plan: a runtime server address first (the demo network risk), then discard draft, photo retake and step notes	Worked
17	"ok do next"	The four features above, across app and API, with 10 unit tests, 4 backend tests and a UI test; ADR-021 to 023	Partially (failure 012 caught by the new UI test and fixed; the photo prune it added also deleted every new photo, found two days later as failure 018)
18	"so whats next"	A short plan: update my demo notes, check dark mode, then stop adding features before the deadline	Worked
19	"so update md and do the checks"	My demo notes updated for the current app (a `Codable` trap caught and verified along the way); UI tests run in dark mode, 29 screens reviewed, Figure 13	Worked (no fixes needed)
20	"i checked the readme and other stuff, i cant give this repos to sir, make it ready to submit"	Both repos prepared for a reader: new READMEs, the report PDF in the repo, the failure log reorganised (index, failures in order, prompts table), template notes and exam wording removed, a broken `lint` script dropped	Worked
21	"make repo public"	Full git history scanned for secrets (none), then both repos made public and checked without signing in	Worked
22	"btw in readme and dark mode ss"	The dark-mode figure added to the README	Worked

#	Exact prompt	What it produced	Result
23	"btw make app more production ready, i mean this style online status look odd, make it production ready" (with a screenshot of the toolbar)	The "● Online 1" pill replaced by a quiet sync icon with an explanatory popover and Sync now (ADR-024), 4 unit tests, new screenshots	Partially (failure 017; the screenshot review found a signed-out icon that read as an account button, a notification left over from another test, "Your 0 records" wording and failure 018; the final full run found failure 019; all fixed. The popover still had no way to sign in: failure 020, reported from my iPhone)
24	"when i click here itd not prompt to signin, fix it" (with a screenshot of the sync popover from my iPhone)	A **Sign in** button in the signed-out popover that opens the sign-in sheet in place; the action modelled in `SyncIndicatorState` with a unit test; the UI test taps it	Partially (failure 020: the new UI test step failed first because the popover's identifier hid the button's, as in 005; fixed)
25	"signin takes too much time, check whats happening", then "i mean request timeout"	The cause found (the Mac's IP changed again); sign-in now fails in 8 s with a clear message and **Change server address**; a unit test; the fixed build on my iPhone	Worked (failure 021; the full run that followed found failure 022, fixed)
26	"push the db to supabase now cli done"	The linked hosted project got the schema, the seed and a new migration that turns on RLS for every table and creates the private photo bucket (ADR-025); checked with the service role and the anon key	Worked
27	"now create test user"	The three test accounts on the hosted project (same emails and roles, new private passwords, since the README's local passwords are public); each checked by signing in and reading its role from the token	Worked
28	"ok um ready to deply this in vercel, show me env to add", then "open .env"	The API made ready for Vercel's zero-configuration Express (default export of `src/app.ts`, ES module), checked locally; the four variables in a private file opened in VS Code, the service-role key kept out of the chat	Worked
29	"ok now make vercel,json"	`vercel.json` running the function in Seoul (`icn1`), next to the database	Worked
30	"https://lablog-backend.vercel.app test this"	A smoke test of the deployed API, as the app uses it (15 checks), with its test record cleaned up	Worked after one fix to the test itself: it looked for `guideSteps`, but the API returns `guide.steps`
31	"now point it in app"	iPhone builds use the hosted backend through a git-ignored, iPhone-only config; the simulator and tests stay local; the Server row is read-only and the sign-in error fits a hosted build; 2 unit tests; installed on my iPhone	Worked

#	Exact prompt	What it produced	Result
32	"it show invalid password" (signing in as the lecturer on my iPhone)	Checked that the hosted lecturer account signs in (200) and that the phone's attempt reached the hosted server, not the Mac; the likely causes: an old saved password filled in by iOS, or a typo	Worked (no fault found in the app)
33	"also when we logout it show offline data, fix it"	Sign-out clears the phone's records with a warning for unsent work, an open record closes itself, a unit test and a UI check (ADR-026)	Worked (failure 024)
34	"in assignmnt check is there any requirmen to keep guest login without signin", "check this" (the brief), "no i need to check are we need to keep guest login without signin"	The brief read in full: it never mentions login, accounts or guests; it requires a backend and offline work that syncs back, so either model meets it	Worked
35	"so dont allow them to use app without signin, keep offline sync as but when they logout do not allow, like whatsapp work"	The app opens on sign-in and can't be used signed out; offline after the first sign-in; sign-out returns to sign-in and clears the phone; a local build can change the server from the sign-in screen; UI tests sign in at launch (ADR-027)	Worked
36	"make login ui more good with apple design and make settngs page more good ui ux"	A first redesign: a welcome screen with a glowing brand mark and three feature rows, and a Settings-style Sync page (account card, sections, Sign Out at the bottom)	Partially: I said it looked too "vibe coded"
37	"its lokk too vibe coded, mak it simple", then "i need simple but proffesional one", then "only show the version, no need to show the server data in login"	Sign-in rebuilt plainly: the real app icon, "Sign in to LabLog", labelled Email and Password fields with show/hide, "Forgot password?" (accounts are reset by the university), one Sign In button, only the version at the bottom; the Sync page's account card as a plain monogram	Worked after the three rounds
38	"ok i found a bug, when i signin and check my prevous lab subsmition, there are missing , fix it"	`GET /api/records/mine` (backend, deployed), restoring records and their photos after sign-in (app), tests at every level, the fix on my iPhone (ADR-028)	Worked (failure 026; Docker had also stopped, failure 025)
39	"lecturers no need access labs neh, they will not do the labes neh, add option to create labs to lecturers , and poin who can do this" (with a screenshot of the lecturer's Records tab); my answers: the lecturer picks the students, full step rules	Lecturer tabs Review · Labs · Sync; create a lab, add experiments with photo, wait and prerequisite rules (checked by the constraint engine in the app and with Kahn's algorithm on the server), choose students; students see only open or enrolled labs (ADR-029); backend, unit and UI tests; deployed and installed	Worked (failure 027 on the way, from the restore feature)
40	"when we click save and create, its wait until backend respond, make it optimized"	Create answers with the new lab or experiment whole (server step ids) and the app adds it to its store and closes the sheet at once, with no catalog refetch; choosing students saves optimistically and reverts on failure; the catalog refresh fetches experiments concurrently instead of one by one	Worked

#	Exact prompt	What it produced	Result
41	"make student choose ui more good"	The student picker rebuilt: a monogram, name and email per student, a checkmark circle that fills when chosen, "2 of 5 selected" with Select All, always-visible search, empty and no-results states, Save only when something changed	Worked
42	"also we cant change exiting expermants steps fix it", then "and make ui better of them"	Editing experiments: `PUT /api/manage/experiments/:id` keeps step ids and refuses to remove a step with students' work (backend test); one editor for new and existing experiments; step rows with a numbered circle and rule symbols (camera, timer, after); experiment rows showing steps, photos and timers; unit test and the lecturer UI test now edits an experiment	Worked
43	"i created test lab and counter now not going check why, also dynamic island not working"	Found the engine's fallback to *now* for a wait with no prerequisites; the wait now runs from the record's start in the engine, the Live Activity and the checklist component; two unit tests; installed on my iPhone	Worked (failure 028; Docker had quit again during the tests, failure 029; checking the fix found failures 030 and 017e, both in the tests)
44	"is all done"	A status check of both repos: everything committed, the iOS repo 8 commits ahead of GitHub; the items only I can do (read and submit the report, reinstall before the signing expires, turn off public sign-up, Docker, viva practice)	Worked
45	"push as me"	The 8 iOS commits checked for my authorship and no co-author lines, then pushed	Worked
46	"did u update the doc ss and markdoen and all"	An audit of the shared doc, screenshots and Markdown. Fixed: four doc sections still showing old screens, the doc's summary, the iOS README ("sign in from the Sync tab", no lecturer figure), the screenshots README and the viva notes; README changes pushed	Worked (gaps found and fixed)
47	"update the report as well"	A full read of the report against the app. Updated: lecturer lab authoring in the idea, the read path, the API table, the constraint chapter (a wait anchored on the record's start; validation when an experiment is written), the checklist's `startedAt`, the lecturer components, the failure and test notes, my own role, limitations; PDF and Word rebuilt	Worked
48	"ok what are the more gaps have, also do not use docker, us the vercel link for testog and make finalzie"	A gap check against the brief; every test moved to the hosted backend (ADR-030): test-only accounts, the backend suite against the deployed API, the simulator and UI tests on the hosted build, a clean-up before and after each run; docs, report and both repos finalised	Worked (failure 031, in the new script)

My own role: I ran the builds on my iPhone 17 Pro and reported problems that the automated tests missed: the repeated crash dialog and the misplaced submit popover early on, and on 18 October a sync popover with no way to sign in (020), a sign-in timeout (021), records left behind after signing out (024), submissions missing after signing back in (026), and a lecturer's timed first step that never counted down (028). I also made the product decisions: sign-in first, lecturers authoring labs, and which students see them.

Lesson learned: the AI's first attempt was often close but not right, for example a layout fix that hid the badge text and UI tests with timing races. Insisting on running real builds, real tests and screenshots after every change is what made the result reliable.

10. Testing and verification

Suite	Count	What it proves
`StepConstraintEngineTests`	13	Precedence, guard order, timer anchoring (including a first step's wait running from the record's start), messages, reachability, Kahn order, cycles, dangling/self edges, bundled catalog validity
`SwiftDataStoreTests`	18	Outbox rules, revision guard, duplicate completions, DTO contents, submit once, catalog replace, tombstones, photo removal, step notes, submitted records locked, sign-out clearing every record but keeping the catalog, restoring server records once without touching local ones, keeping only the labs the server lists
`SyncEngineTests`	9	Draining, photo-first ordering, per-item failure, network error, offline/signed-out, no backend, cyclic catalog skipped, a synced tombstone leaving the device, restoring records with their notes, observation and photos (the local copy wins)
`ServerEndpointTests`	5	Host replacement keeps scheme, ports and path; switching and resetting; host validation; sign-in to an address where nothing answers fails fast and says what to fix; a hosted backend has no address to change
`ExperimentDraftTests`	4	A lecturer's new experiment: the request carries rules by step number, removing a step renumbers the rules, editing an existing experiment keeps its step ids, and problems (including a loop found by the constraint engine) block saving
`SyncIndicatorStateTests`	4	The toolbar sync icon: quiet when synced, *Offline* wins over everything, waiting / failed / signed-out states, the on-device build
`LiveActivityAndGuideTests`	10	Which step drives the timer (a timed first step runs from the record's start), deep-link parsing, guides on every step, catalog upgrade, server JSON decoding, lecturer role read from the JWT (and not from user-editable metadata)

Suite	Count	What it proves
UI tests (XCUITest)	6	The full titration flow to submission (GPS stamp checked); timer, dial and Dynamic Island; sign-in and sync to the real backend; a student submits and a lecturer reviews it; retake, note, discard and the server-address check. Titration, timer and editing also run in dark appearance; a lecturer creates a lab, adds an experiment with step rules, edits it to add a step, and enrols a student. Every test signs in first, and the sign-in test signs out and back in to check the record is restored
Backend end-to-end (`node --test`)	20 (19 against the deployed API; the LAN-address test is local-only)	Auth (401), catalog and guides, idempotent sync, 422 validation, anti-hijack 403/409, signed upload retry, lecturer 403/200 with working photo URLs, storage URLs following the caller's host, retake replacing the stored photo, upper-case ids from the app keeping their photo, draft tombstones (idempotent, drafts only, owner only), a student getting their own records back (and nobody else's), lecturers creating labs with enrolment deciding who sees them, editing an experiment keeping its step ids (409 when a removed step has student work), a step loop refused with 422

The final runs on 18 October 2026 used the hosted backend, with no Docker (ADR-030): all 63 unit tests and 6 UI tests passed together in one run, signed in as test-only accounts whose data was then deleted, and the backend suite passed against the deployed API (19 passed; the LAN-address test only applies to a local stack and was skipped). Earlier that day all of them, that one included, had also passed against the local stack (Xcode 27.0, iOS 26 simulator; Node 22; Postgres 17).

11. Limitations and future work

- **Hosting and testing.** Development started on a local Supabase stack in Docker plus the API on a laptop (ADR-018). Its address changed twice (failures 015 and 021), under load the local database once timed out (023), and Docker Desktop quit by itself four times on 18 October (025, 029). So the API was deployed to Vercel and the database to a free Supabase project with every table locked by row-level security (ADR-025), and since ADR-030 the phone, the simulator and every test use it, with no Docker. The costs: the tests need the internet, and they write to the same project as the demo, under test-only accounts whose data is deleted after each run; a separate staging project would be the next step. A free project pauses after a week without use, so it has to be resumed before a demo.
- **Conflicts.** Records have a single author, so the server applies the last write. Shared or group records would need a merge strategy.
- **Live Activity "ready" state.** It relies on the activity's stale date; push-token updates would make the switch instant.
- **Lecturer experience.** Lecturers can review submissions and create and edit labs in the app, but grading (comments, marks) is future work, labs and experiments can't be deleted yet, and the review and management screens need a connection. Sync doesn't re-check enrolment for a record; a student only ever sees enrolled labs, so this would need a deliberate bypass.
- **Platforms.** iPhone only; iPad layouts and Android are out of scope.

Appendix

A. Running the project

The hosted backend needs no local services (ADR-030). The deployed API is at `https://lablog-backend.vercel.app/api`.

```
# Backend: the 20 end-to-end tests against the deployed API (needs .env.hosted)
cd lablog-backend && npm install
npm run test:hosted

# iOS: with Config/Secrets.hosted.xcconfig, every build uses the hosted backend;
# 63 unit + 6 UI tests, signed in as test-only accounts, cleaned up afterwards
cd lablog-ios && scripts/test-hosted.sh
```

Optional local stack for offline development (Docker and the Supabase CLI): `supabase start`, `npm run local:setup -- --host <Mac LAN IP>`, `npm run dev` and `npm run test:e2e`, with the printed values in `Config/Secrets.xcconfig` and no hosted xcconfig. Its demo accounts are `student@lablog.test` / `LabLog-Student-1` and `lecturer@lablog.test` / `LabLog-Lecturer-1`; the hosted accounts have private passwords. Without either config the app runs fully offline in on-device mode.

B. Environment

Xcode 27.0 · Swift 6.4 · deployment target iOS 17 · tested on an iPhone 17 Pro (iOS 27.2) and the iPhone 17 Pro simulator (iOS 26.0.1) · Node 22 · Express 4 · zod 3 · Supabase CLI 2.53 · Postgres 17.

C. Size

About 8,400 lines of Swift in the app and widget, 1,500 lines of Swift tests, 1,300 lines of TypeScript (API and scripts), and 740 lines of SQL and end-to-end tests.

D. Academic integrity

All images, icons and diagrams are original: drawn in code or captured from the app. No existing codebase was copied. Libraries and frameworks are used only as libraries; the custom components and the constraint logic are my own work.

Area	Libraries, frameworks and tools used
iOS app (Apple frameworks)	SwiftUI, UIKit (camera picker), SwiftData, Observation, CoreLocation, MapKit, Network (`NWPathMonitor`), Security (Keychain), UserNotifications, OSLog
Widget extension	WidgetKit, ActivityKit (Live Activity / Dynamic Island), AppIntents
iOS tests	XCTest, XCUITest
Backend runtime	Express, zod, @supabase/supabase-js, cors, dotenv
Backend tooling	TypeScript, tsx, Node 22 test runner
Infrastructure	Supabase (Postgres, Auth, Storage), hosted and via the Supabase CLI; Vercel (the API); Docker (optional local stack)

Help to or from batch mates: None. No help was given to or received from batch mates.